

IES Report




**BoxRail® | 107 | Diffuse | 80 CRI | LO**

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	79	79	79
Total Lumens, 4' rail length (1219mm)	1132	1167	1179	1179
Lumens per foot (305mm)	283	292	295	295
Input Power (W), 4' rail length (1219mm)	15.0	15.0	15.0	15.0
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

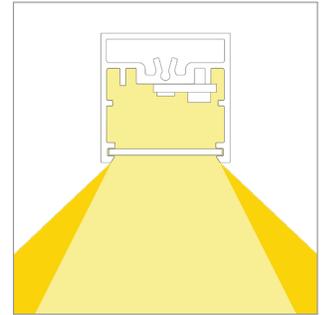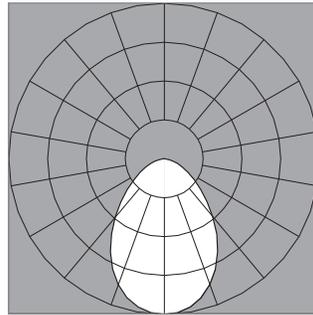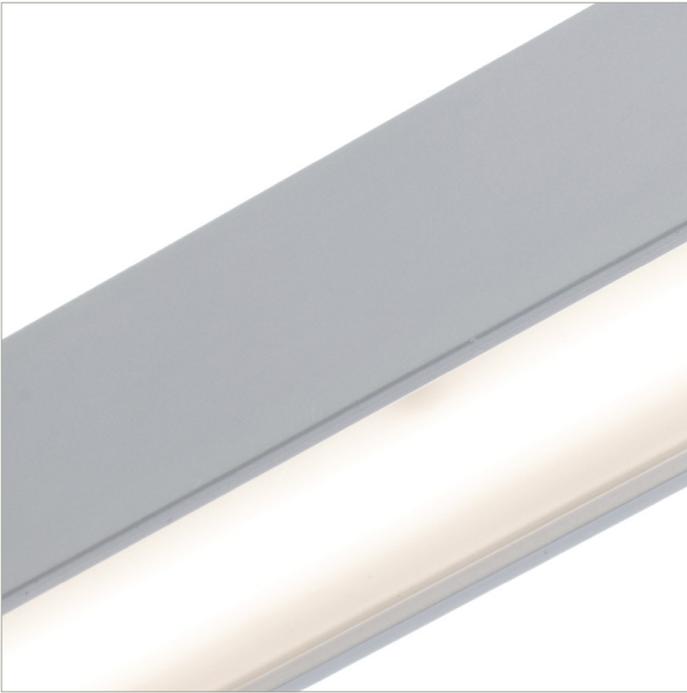

**IES Report**



**BoxRail® | 107 | Diffuse | 80 CRI | SO**

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	94	97	98	98
Total Lumens, 4' rail length (1219mm)	2263	2334	2358	2358
Lumens per foot (305mm)	566	584	589	589
Input Power (W), 4' rail length (1219mm)	24.1	24.1	24.1	24.1
Watts per foot (305mm)	6.1	6.1	6.1	6.1
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

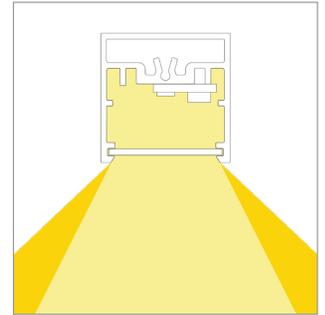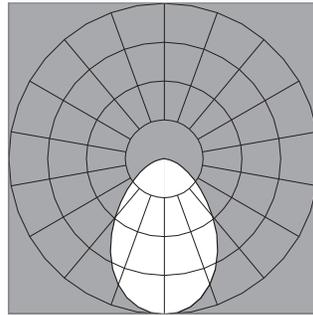

IES Report




**BoxRail® | 107 | Diffuse | 80 CRI | HO**

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	88	91	92	92
Total Lumens, 4' rail length (1219mm)	4301	4435	4480	4480
Lumens per foot (305mm)	1075	1109	1120	1120
Input Power (W), 4' rail length (1219mm)	49.2	49.2	49.2	49.2
Watts per foot (305mm)	12.4	12.4	12.4	12.4
CRI	85	85	85	85

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

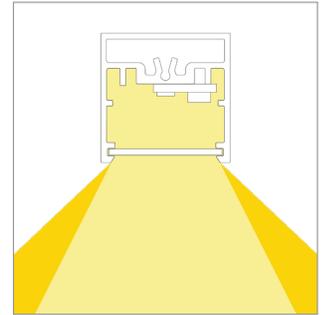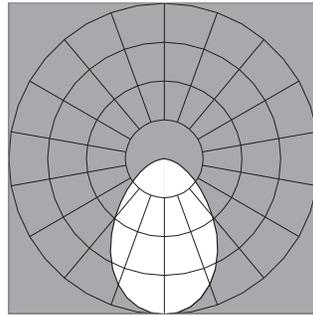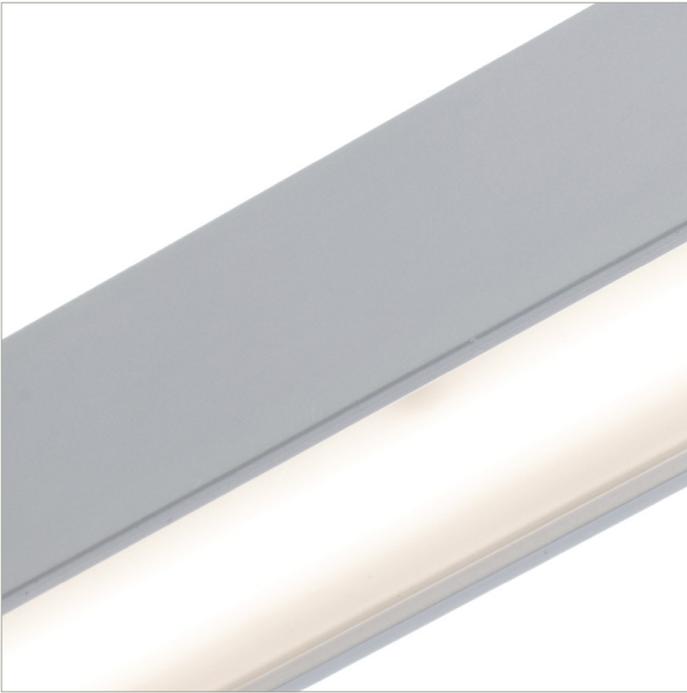

IES Report




**BoxRail® | 107 | Diffuse | 90 CRI | LO**

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	66	68	69	71
Total Lumens, 4' rail length (1219mm)	978	1009	1029	1050
Lumens per foot (305mm)	244	252	257	262
Input Power (W), 4' rail length (1219mm)	15.0	15.0	15.0	15.0
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

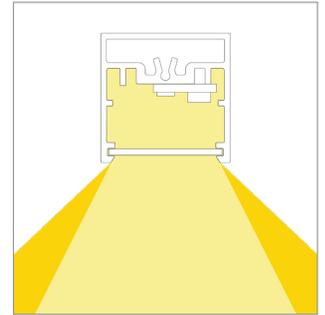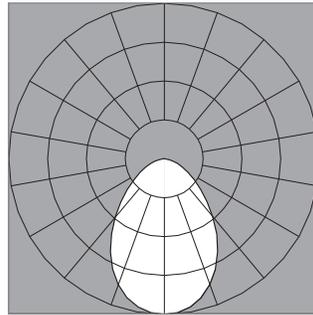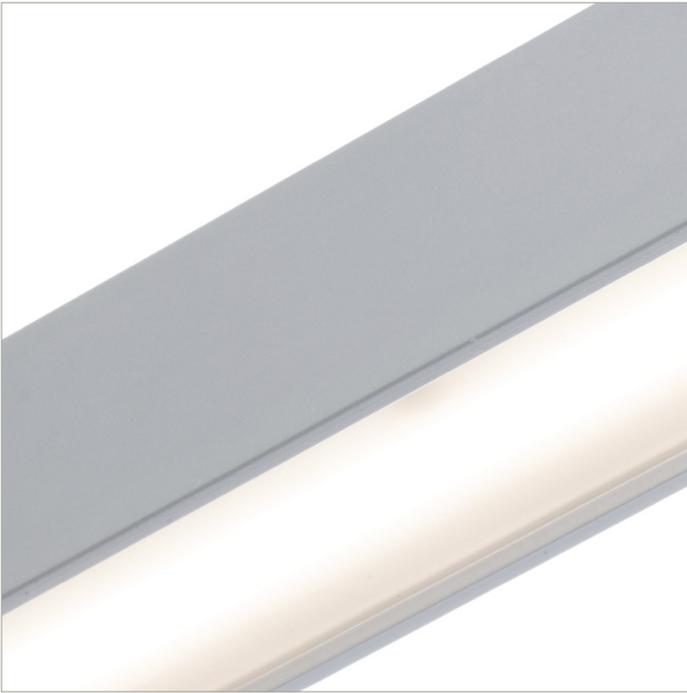

IES Report




**BoxRail® | 107 | Diffuse | 90 CRI | SO**

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	82	84	86	88
Total Lumens, 4' rail length (1219mm)	1956	2018	2059	2100
Lumens per foot (305mm)	489	504	515	525
Input Power (W), 4' rail length (1219mm)	24.1	24.1	24.1	24.1
Watts per foot (305mm)	6.1	6.1	6.1	6.1
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

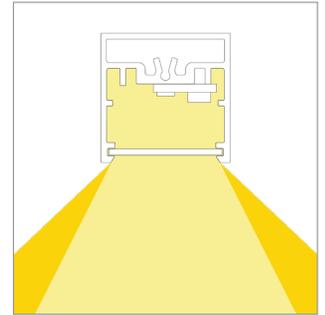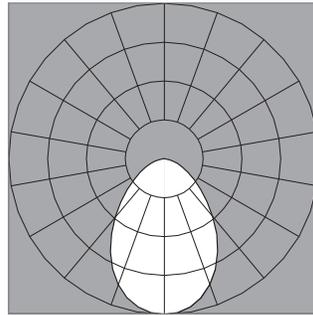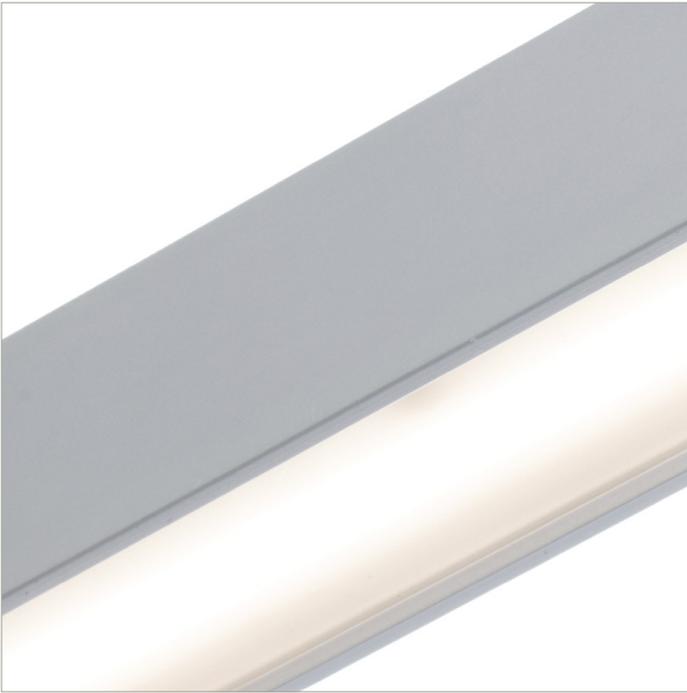

IES Report

**BoxRail® | 107 | Diffuse | 90 CRI | HO**

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-1-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	78	80	82
Total Lumens, 4' rail length (1219mm)	3716	3833	3912	3990
Lumens per foot (305mm)	929	958	978	997
Input Power (W), 4' rail length (1219mm)	49.2	49.2	49.2	49.2
Watts per foot (305mm)	12.4	12.4	12.4	12.4
CRI	96	96	96	96

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).