

## IES Report



### ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 80 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-35-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	95	98	100	100
Total Lumens, 4' rail length (1219mm)	2807	2896	2955	2955
Lumens per foot (305mm)	702	724	739	739
Lumens per foot UP (305mm)	472	487	497	497
Lumens per foot DOWN (305mm)	230	237	242	242
Input Power (W), 4' rail length (1219mm)	29.8	29.8	29.8	29.8
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).



## IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 80 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-35-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	108	111	114	114
Total Lumens, 4' rail length (1219mm)	5614	5791	5909	5909
Lumens per foot (305mm)	1403	1448	1477	1477
Lumens per foot UP (305mm)	944	973	993	993
Lumens per foot DOWN (305mm)	460	474	484	484
Input Power (W), 4' rail length (1219mm)	52.2	52.2	52.2	52.2
Watts per foot (305mm)	13.1	13.1	13.1	13.1
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](https://vode.com).



## IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 80 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-35-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	100	103	105	105
Total Lumens, 4' rail length (1219mm)	10666	11003	11228	11228
Lumens per foot (305mm)	2667	2751	2807	2807
Lumens per foot UP (305mm)	1793	1849	1887	1887
Lumens per foot DOWN (305mm)	874	901	920	920
Input Power (W), 4' rail length (1219mm)	107.7	107.7	107.7	107.7
Watts per foot (305mm)	27.0	27.0	27.0	27.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).

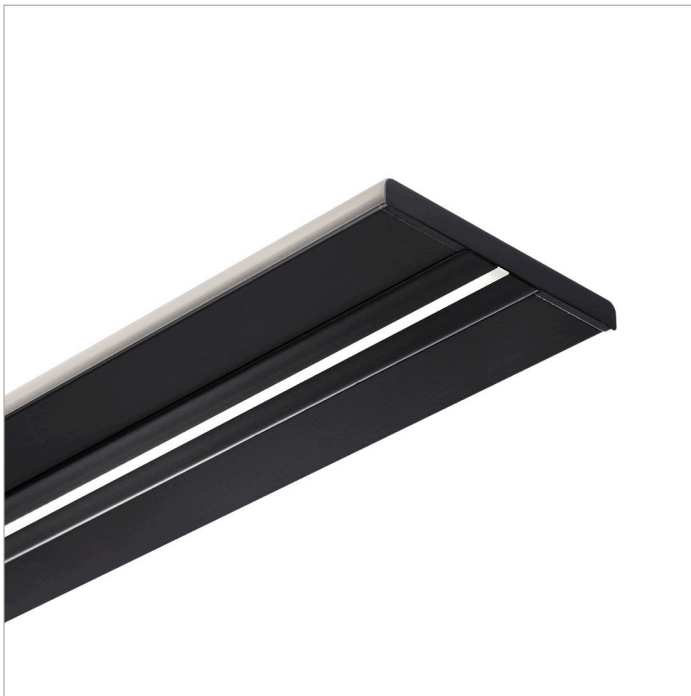

## IES Report



### ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 90 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-359-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	82	84	86	89
Total Lumens, 4' rail length (1219mm)	2420	2496	2547	2573
Lumens per foot (305mm)	605	624	637	643
Lumens per foot UP (305mm)	407	420	428	432
Lumens per foot DOWN (305mm)	198	204	209	211
Input Power (W), 4' rail length (1219mm)	29.8	29.8	29.8	29.8
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI*	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).



## IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 90 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-359-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	94	97	99	103
Total Lumens, 4' rail length (1219mm)	4839	4992	5094	5145
Lumens per foot (305mm)	1210	1248	1274	1286
Lumens per foot UP (305mm)	813	839	856	865
Lumens per foot DOWN (305mm)	396	409	417	421
Input Power (W), 4' rail length (1219mm)	51.8	51.8	51.8	51.8
Watts per foot (305mm)	13	13	13	13
CRI*	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).



## IES Report

### ZipThree® | Ceiling Cable | 707 | Symmetric with EdgeGlow, up | 60° Symmetric, down | 90 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-359-U2S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	86	89	90	94
Total Lumens, 4' rail length (1219mm)	9195	9485	9679	9776
Lumens per foot (305mm)	2299	2371	2420	2444
Lumens per foot UP (305mm)	1546	1594	1627	1643
Lumens per foot DOWN (305mm)	753	777	793	801
Input Power (W), 4' rail length (1219mm)	107.7	107.7	107.7	107.7
Watts per foot (305mm)	27	27	27	27
CRI*	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](http://vode.com).