

IES Report




ZipWave® | 707 | Clear with EdgeSoft™ | 80 CRI | LO

707-Z9-4-48-AW / EW-XX-X-0-Z-LO-35-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	126	130	132	132
Total Lumens, 4' rail length (1219mm)	1866	1925	1965	1965
Lumens per foot (305mm)	467	481	491	491
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

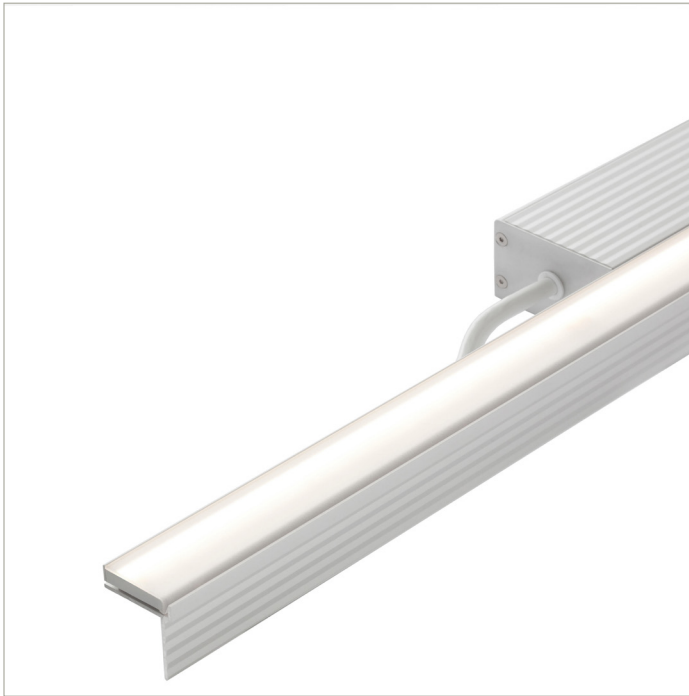

IES Report



ZipWave® | 707 | Clear with EdgeSoft™ | 80 CRI | SO

707-Z9-4-48-AW / EW-XX-X-0-Z-SO-35-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	142	146	149	149
Total Lumens, 4' rail length (1219mm)	3733	3850	3929	3929
Lumens per foot (305mm)	933	963	982	982
Input Power (W), 4' rail length (1219mm)	26.4	26.4	26.4	26.4
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

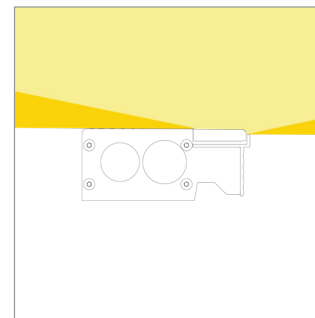

IES Report




ZipWave® | 707 | Clear with EdgeSoft™ | 80 CRI | HO

707-Z9-4-48-AW / EW-XX-X-0-Z-HO-35-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	132	137	139	139
Total Lumens, 4' rail length (1219mm)	7092	7316	7465	7465
Lumens per foot (305mm)	1773	1829	1866	1866
Input Power (W), 4' rail length (1219mm)	53.7	53.7	53.7	53.7
Watts per foot (305mm)	13.5	13.5	13.5	13.5
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

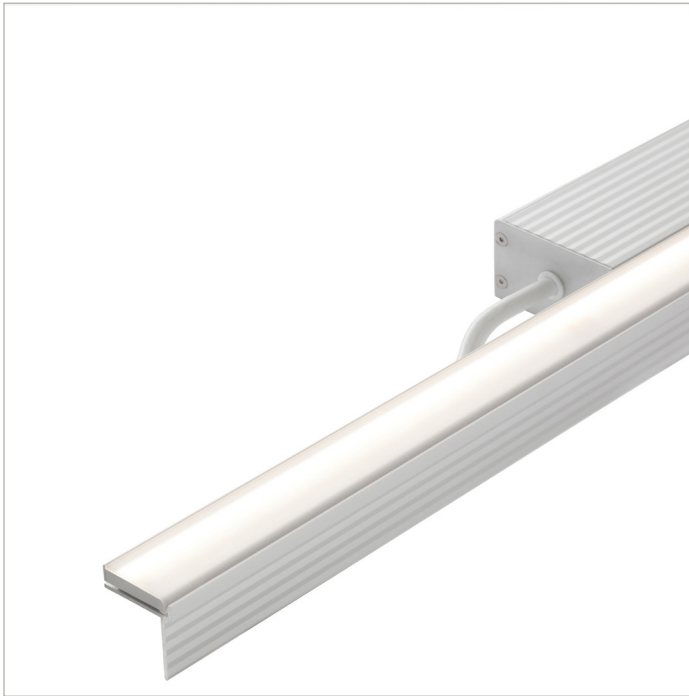

IES Report




ZipWave® | 707 | Clear with EdgeSoft™ | 90 CRI | LO

707-Z9-4-48-AW / EW-XX-X-0-Z-LO-359-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	109	112	114	119
Total Lumens, 4' rail length (1219mm)	1609	1660	1694	1710
Lumens per foot (305mm)	402	415	423	428
Input Power (W), 4' rail length (1219mm)	14.9	14.9	14.9	14.9
Watts per foot (305mm)	3.8	3.8	3.8	3.8
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

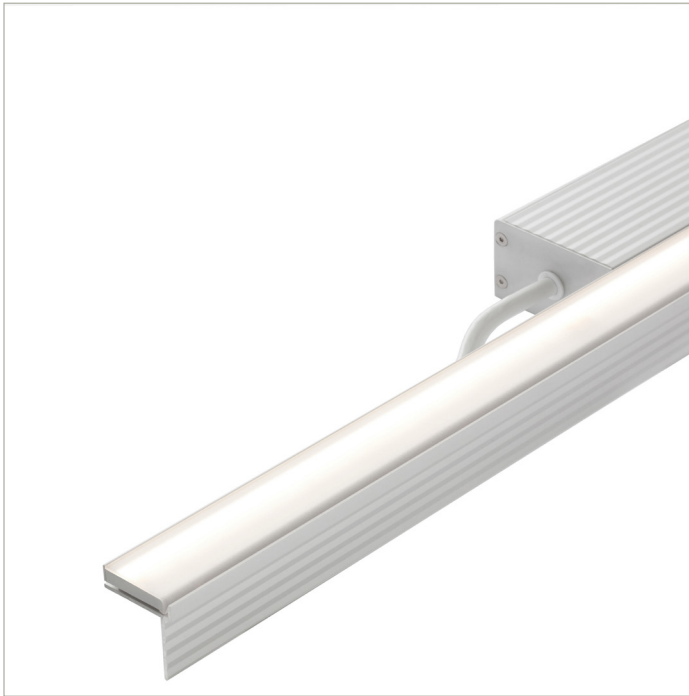

IES Report




ZipWave® | 707 | Clear with EdgeSoft™ | 90 CRI | SO

707-Z9-4-48-AW / EW-XX-X-0-Z-SO-359-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	122	126	129	134
Total Lumens, 4' rail length (1219mm)	3218	3319	3387	3421
Lumens per foot (305mm)	804	830	847	855
Input Power (W), 4' rail length (1219mm)	26.4	26.4	26.4	26.4
Watts per foot (305mm)	6.7	6.7	6.6	6.7
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

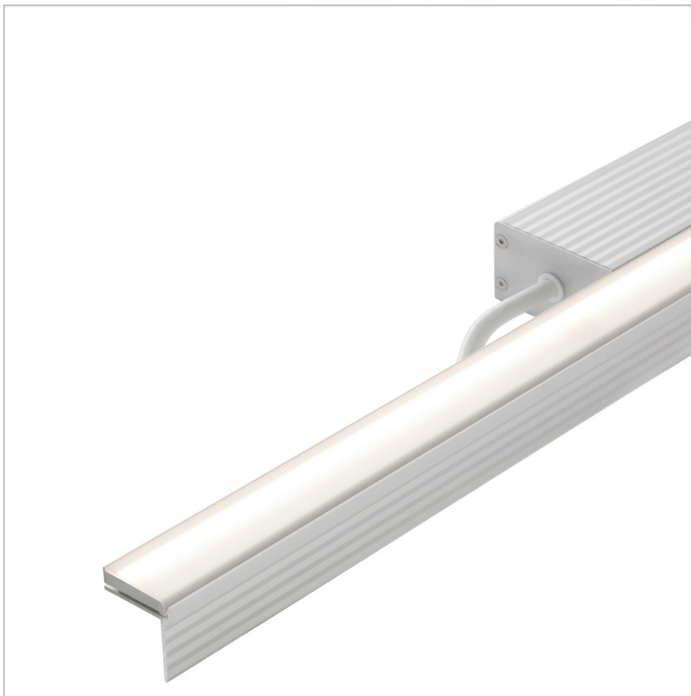

IES Report

ZipWave® | 707 | Clear with EdgeSoft™ | 90 CRI | HO

707-Z9-4-48-AW / EW-XX-X-0-Z-HO-359-C1-0-AL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	112	116	118	123
Total Lumens, 4' rail length (1219mm)	5994	6183	6310	6373
Lumens per foot (305mm)	1499	1546	1577	1593
Input Power (W), 4' rail length (1219mm)	53.7	53.7	53.7	53.7
Watts per foot (305mm)	13.5	13.5	13.5	13.5
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).