



IES Report

ZipTwo® | 707 | 40° Symmetric | 90 CRI | SO

707-Z2-4-48-XX-XX-X-0-Z-SO-359-S1-X-BL-0

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	37	38	39	39
Total Lumens, 4' rail length (1219mm)	957	987	1007	1017
Lumens per foot (305mm)	239	247	252	254
Input Power (W), 4' rail length (1219mm)	26.2	26.2	26.2	26.2
Watts per foot (305mm)	6.6	6.6	6.6	6.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



8165 E Kaiser Blvd.
Anaheim, CA 92808
www.lightlaboratory.com

Report No: L121911527



Report No: L121911527

Issue Date: 1/7/2020

Report Prepared For: Vode Lighting
21684 8th Street East, Suite 700, Sonoma, CA 95476

Model Number: 707-Z2-48-Z-SO-359-S1-BL

Test: Photometric/Colorimetric/Electrical Test

Standards Used: Appropriate part or all test guidelines were used for test performed:

IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products

ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products

ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 12/16/19

Date of Tests: 1/3/19 - 1/7/19

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	1/9/21
BK PRECISION	1747	PS-DC04	1/10/21
Fluke Digital Thermometer	52K/J	MT-TP05	1/10/21
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	Vode Lighting
Model Number:	707-Z2-48-Z-SO-359-S1-BL
Driver Model Number:	MEAN WELL HLG-40H-36A

Test Summary

Total Lumens:	1007.31
Efficacy:	38.75
Color Redering Index:	93.7
Correlated Color Temperature:	3413
Input Voltage (VAC/60Hz):	120.00
Input Current (Amp):	0.2178
Input Power (W):	26.00
Input Power Factor:	0.9943
Current ATHD (%):	7.9%

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	0:40
Total Operating Time (Hours):	1:35


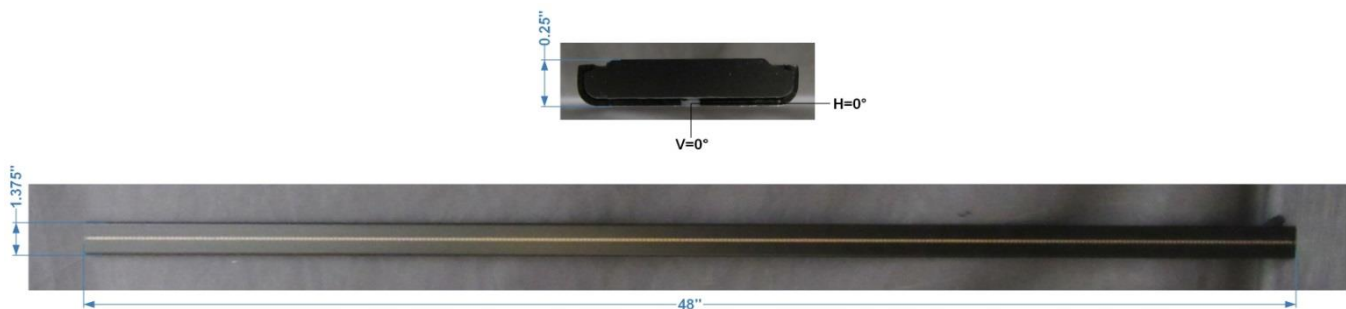


FIG. 1 LUMINAIRE

Colorimetry Test Results

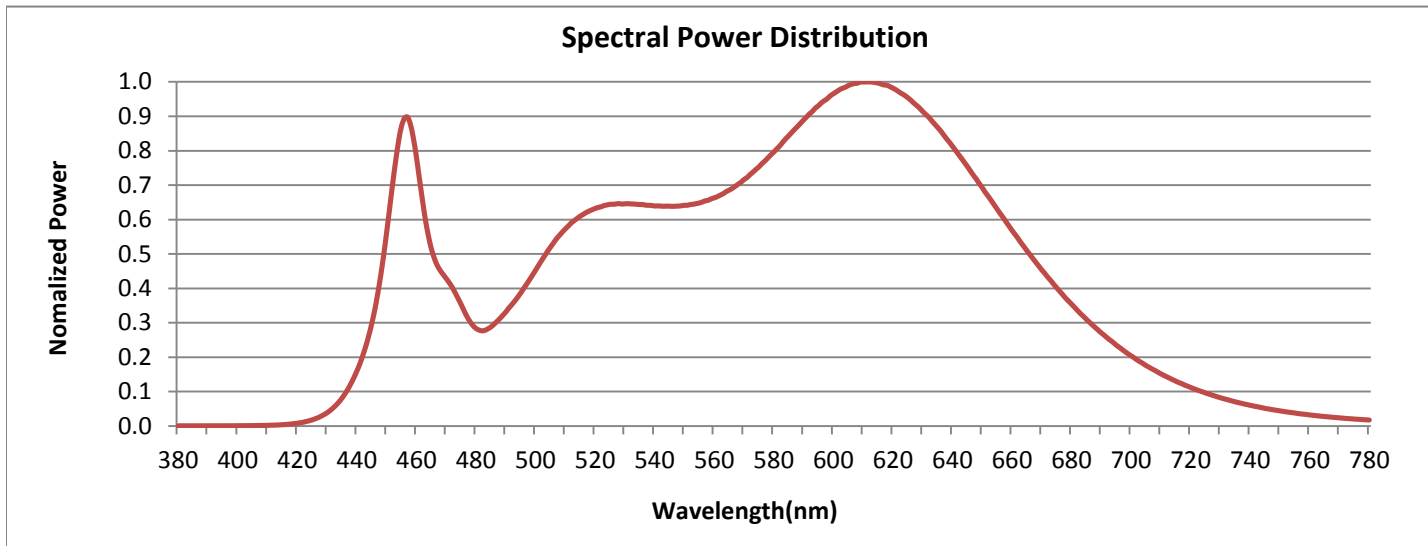


CRI & CCT

x	0.4092
y	0.3905
u'	0.2383
v'	0.5118
CRI	93.70
CCT	3413
Duv	-0.00093

R Values

R1	96.12
R2	99.35
R3	97.23
R4	95.63
R5	95.99
R6	95.32
R7	89.77
R8	80.52
R9	57.17
R10	98.41
R11	98.55
R12	76.82
R13	98.03
R14	99.39
R15	90.38

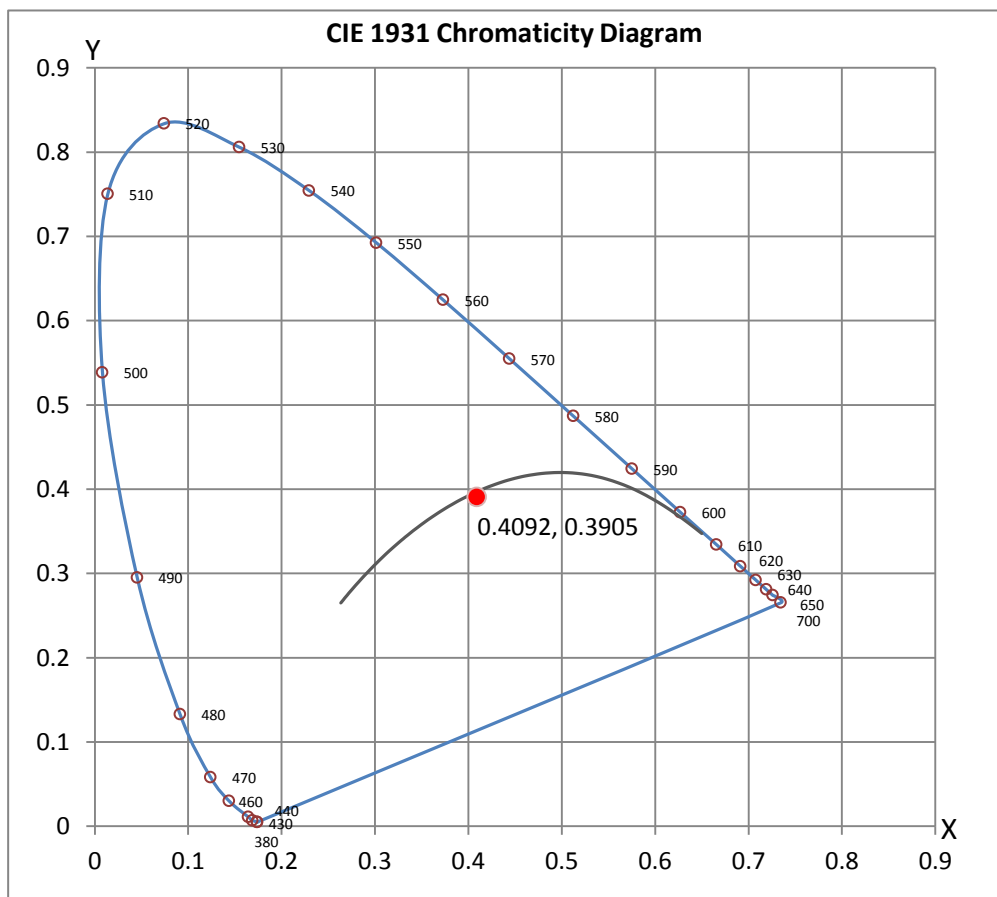



8165 E Kaiser Blvd.
Anaheim, CA 92808
www.lightlaboratory.com

Report No: L121911527



Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Keyur Patel

Test Report Reviewed by:

Steve Kang
Quality Assurance

**Attached are photometric data reports. Total number of pages: 9*



8165 E. Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Photometric Test Report

IES INDOOR REPORT

PHOTOMETRIC FILENAME : L121911527.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L121911527
[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
[ISSUEDATE] 1/7/2020
[MANUFAC] Vode Lighting
[LUMCAT] 707-Z2-48-Z-SO-359-S1-BL
[LUMINAIRE] ZipTwo LED, 48", 3500K, 90 CRI, zipper board, 40° black symmetric lens,
[MORE] standard output, black anodized finish
[BALLASTCAT] MEAN WELL HLG-40H-36A
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[INPUT] 120.0VAC, 26.0W
[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1007
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	39
Total Luminaire Watts	26
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.76
Spacing Criterion (90-270)	1.04
Spacing Criterion (Diagonal)	0.90
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	0.01 ft
Luminous Width (90-270)	3.98 ft
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	32430	58328	101137
55	15399	29654	57848
65	8682	16642	33975
75	5690	10367	21349
85	4433	6882	11688

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L121911527.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0.0	914.01	914.01	914.01	914.01	914.01	914.01	914.01	914.01	914.01	914.01
1.0	914.94	914.90	914.94	914.86	915.11	914.94	914.94	914.94	914.98	914.94
3.0	909.83	909.83	909.74	909.58	910.04	910.16	910.62	910.79	911.00	911.38
5.0	894.57	894.70	894.86	895.45	895.87	896.92	898.01	899.22	900.40	901.65
7.0	870.85	871.02	871.77	872.90	874.37	876.05	878.14	880.82	883.42	886.15
9.0	839.83	840.21	841.30	843.14	845.78	848.76	852.53	856.39	860.58	864.81
11.0	802.11	802.66	804.12	806.85	810.50	814.85	819.97	825.75	832.25	838.49
13.0	759.45	760.33	762.46	765.77	770.51	776.34	783.00	790.92	798.93	807.90
15.0	711.83	712.84	715.61	719.71	725.54	733.29	741.72	751.52	761.84	772.90
17.0	661.62	661.92	665.48	670.68	678.01	686.60	696.37	708.57	721.31	734.01
19.5	592.30	593.81	597.71	603.95	612.59	622.85	635.26	649.01	664.22	680.40
22.5	509.48	511.08	515.60	522.69	532.66	545.07	559.65	575.96	593.81	612.29
25.5	426.66	428.55	433.37	441.04	451.85	465.81	481.74	500.01	520.04	540.96
29.0	335.97	337.73	342.55	350.47	361.91	376.24	392.97	412.50	434.04	456.55
33.0	246.19	247.78	252.48	259.81	270.46	283.91	300.09	319.12	340.62	363.17
37.5	166.31	167.69	171.50	177.79	186.47	198.37	212.41	228.97	247.57	268.36
42.5	104.36	105.24	108.09	112.58	119.07	127.92	138.48	151.64	167.02	183.70
47.5	65.38	66.01	67.81	71.00	75.48	81.52	88.90	98.24	109.31	121.59
55.0	32.69	32.98	33.95	35.58	37.97	41.16	45.06	50.04	56.12	62.95
65.0	13.58	13.75	14.17	14.84	15.80	17.02	18.69	20.70	23.09	26.03
75.0	5.45	5.49	5.66	5.83	6.24	6.71	7.29	8.05	8.89	9.93
85.0	1.43	1.43	1.43	1.47	1.59	1.63	1.76	1.84	2.05	2.22
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Vert. Angles **Horizontal Angles**

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0.0	914.01	914.01	914.01	914.01	914.01	914.01	914.01	914.01	914.01
1.0	915.11	914.98	915.02	914.98	914.98	914.90	914.86	914.98	915.28
3.0	911.80	912.13	912.43	912.72	913.05	913.22	913.60	913.72	913.68
5.0	902.87	904.13	905.22	906.26	907.23	907.81	908.40	908.90	909.24
7.0	888.54	891.43	893.98	895.83	897.46	899.47	900.44	901.11	901.53
9.0	869.67	873.91	877.81	881.62	885.01	887.65	889.92	891.18	891.13
11.0	845.62	851.90	857.69	863.09	868.33	872.36	875.42	877.05	878.14
13.0	817.16	825.33	833.42	842.01	848.17	854.00	858.44	860.79	861.38
15.0	784.13	795.57	806.01	815.78	824.37	831.53	836.44	839.88	841.85
17.0	747.79	760.87	774.32	786.48	796.87	805.93	812.26	816.57	818.21
19.5	696.83	712.84	728.18	743.52	756.93	767.79	776.59	781.49	783.17
22.5	632.16	651.19	669.71	688.15	703.70	716.36	726.50	733.17	734.72
25.5	563.00	584.63	605.38	626.21	643.81	658.23	670.01	677.80	680.65
29.0	480.40	504.62	527.34	548.96	568.16	585.30	597.46	605.46	609.07
33.0	387.48	411.95	435.30	458.56	477.59	494.86	508.48	516.02	517.95
37.5	291.58	314.05	336.30	358.35	377.17	392.93	404.87	412.54	416.19
42.5	202.31	221.00	240.32	258.97	275.24	289.03	299.71	306.34	308.98
47.5	135.63	150.09	164.92	179.55	192.04	203.57	212.28	217.82	220.37
55.0	70.79	79.34	88.18	97.32	105.41	112.70	118.36	121.92	122.80
65.0	29.30	33.03	36.88	40.95	44.76	48.07	50.92	52.64	53.14
75.0	11.23	12.53	14.00	15.55	16.97	18.36	19.41	20.08	20.45
85.0	2.43	2.64	2.85	3.10	3.27	3.44	3.65	3.69	3.77
90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : L121911527.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	287.70	N.A.	28.60
0-30	531.13	N.A.	52.70
0-40	718.57	N.A.	71.30
0-60	930.62	N.A.	92.40
0-80	999.22	N.A.	99.20
0-90	1007.31	N.A.	100.00
10-90	938.36	N.A.	93.20
20-40	430.87	N.A.	42.80
20-50	578.00	N.A.	57.40
40-70	259.52	N.A.	25.80
60-80	68.60	N.A.	6.80
70-80	21.13	N.A.	2.10
80-90	8.09	N.A.	0.80
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1007.31	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	68.95
10-20	218.74
20-30	243.43
30-40	187.44
40-50	147.13
50-60	64.92
60-70	47.47
70-80	21.13
80-90	8.09
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : L121911527.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	94	95	93	92	90
2	104	98	93	89	102	96	92	88	93	89	86	90	87	84	87	85	82	80
3	98	90	83	78	95	88	82	78	85	81	77	83	79	75	80	77	74	72
4	91	82	75	70	89	81	75	70	79	73	69	76	72	68	75	70	67	65
5	86	76	69	63	84	75	68	63	73	67	62	71	66	62	69	65	61	59
6	81	70	63	58	79	69	62	57	67	61	57	66	61	56	64	60	56	54
7	76	65	58	53	74	64	57	53	63	57	52	61	56	52	60	55	52	50
8	72	60	53	49	70	60	53	48	59	53	48	57	52	48	56	51	48	46
9	68	56	50	45	66	56	49	45	55	49	45	54	48	44	53	48	44	43
10	64	53	46	42	63	52	46	42	52	46	42	51	45	41	50	45	41	40

POLAR GRAPH

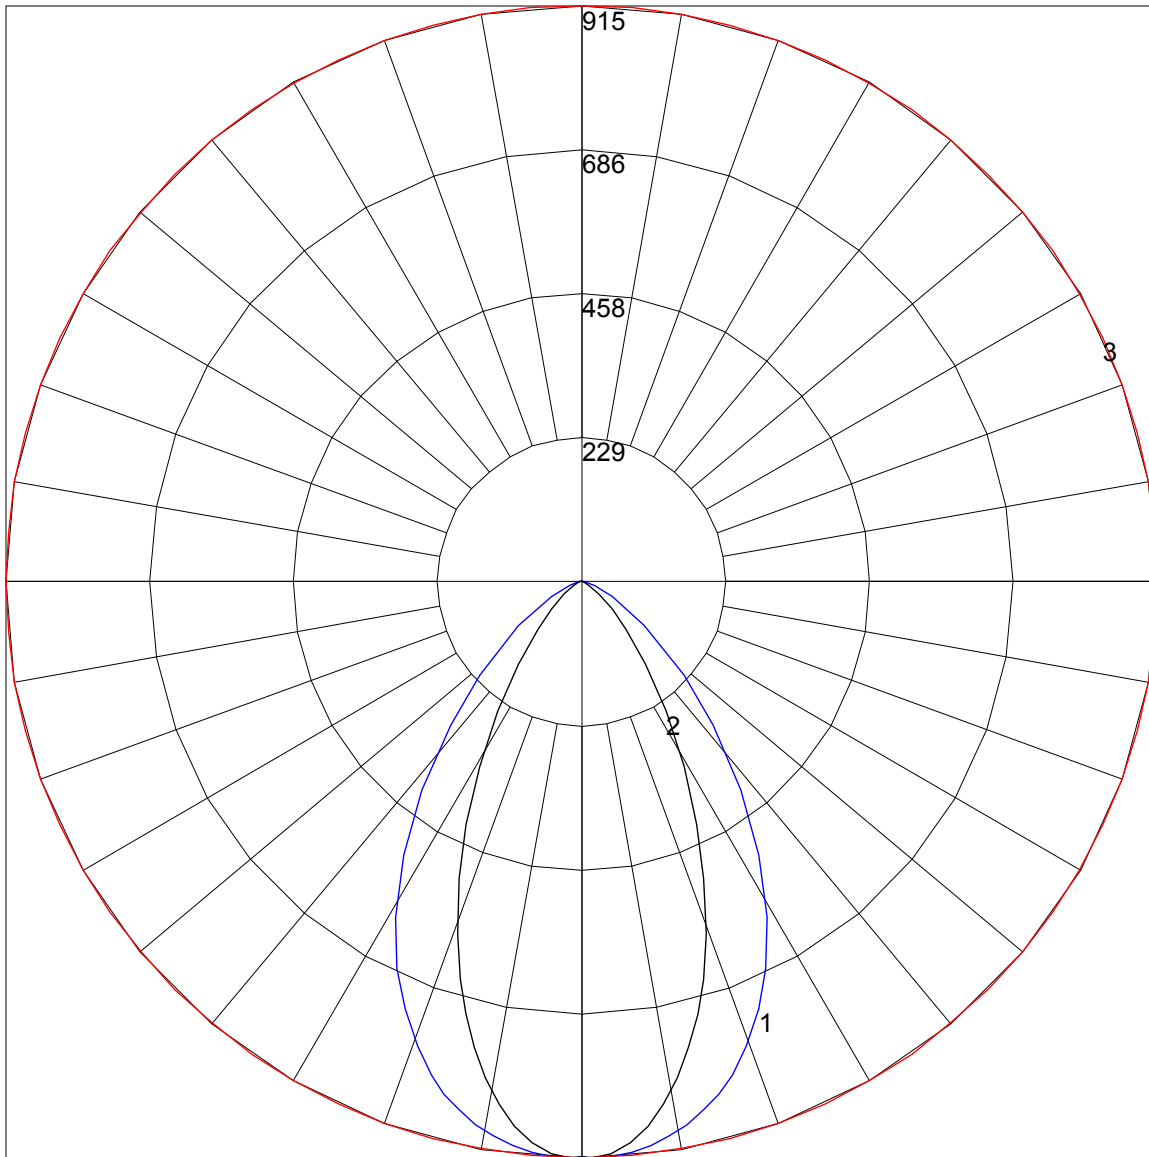

Maximum Candela = 915.28 Located At Horizontal Angle = 90, Vertical Angle = 1
1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (0 - 180)
3 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)