

IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric, up | 60° Symmetric, down | 80 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-35-U1S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	90	93	95	95
Total Lumens, 4' rail length (1219mm)	2662	2746	2802	2802
Lumens per foot (305mm)	665	687	701	701
Lumens per foot UP (305mm)	439	453	462	462
Lumens per foot DOWN (305mm)	226	234	238	238
Input Power (W), 4' rail length (1219mm)	29.8	29.8	29.8	29.8
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report




ZipThree® | Ceiling Cable | 707 | Symmetric, up | 60° Symmetric, down | 80 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-35-U1S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	102	106	108	108
Total Lumens, 4' rail length (1219mm)	5324	5492	5604	5604
Lumens per foot (305mm)	1331	1373	1401	1401
Lumens per foot UP (305mm)	878	906	924	924
Lumens per foot DOWN (305mm)	453	467	477	477
Input Power (W), 4' rail length (1219mm)	52.2	52.2	52.2	52.2
Watts per foot (305mm)	13.1	13.1	13.1	13.1
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.

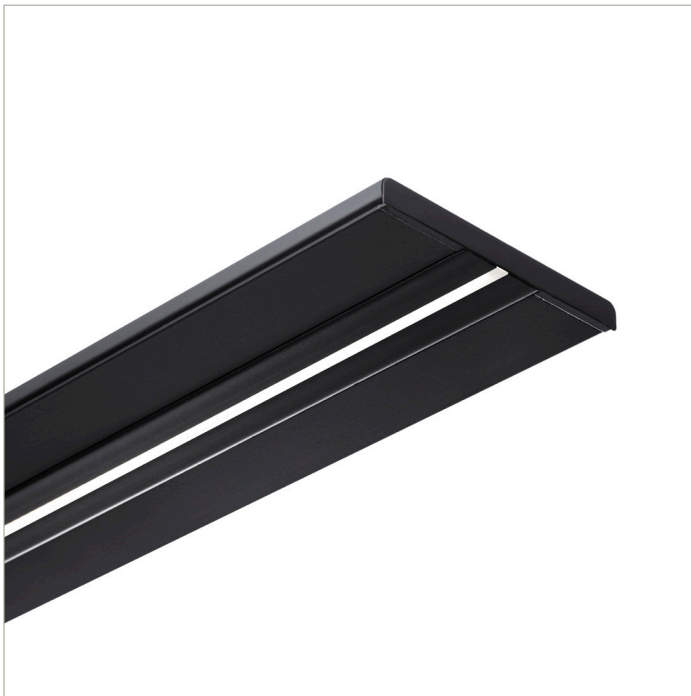

IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric, up | 60° Symmetric, down | 80 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-35-U1S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	94	97	99	99
Total Lumens, 4' rail length (1219mm)	10116	10435	10648	10648
Lumens per foot (305mm)	2529	2609	2662	2662
Lumens per foot UP (305mm)	1668	1721	1756	1756
Lumens per foot DOWN (305mm)	860	888	906	906
Input Power (W), 4' rail length (1219mm)	107.7	107.7	107.7	107.7
Watts per foot (305mm)	27.0	27.0	27.0	27.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric, up | 60° Symmetric, down | 90 CRI | LO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-LO-359-U1S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	78	80	82	82
Total Lumens, 4' rail length (1219mm)	2295	2367	2416	2440
Lumens per foot (305mm)	574	592	604	610
Lumens per foot UP (305mm)	379	390	398	402
Lumens per foot DOWN (305mm)	195	201	205	208
Input Power (W), 4' rail length (1219mm)	29.8	29.8	29.8	29.8
Watts per foot (305mm)	7.5	7.5	7.5	7.5
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report



ZipThree® | Ceiling Cable | 707 | Symmetric, up | 60° Symmetric, down | 90 CRI | SO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-SO-359-U1S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	89	92	94	95
Total Lumens, 4' rail length (1219mm)	4590	4735	4831	4879
Lumens per foot (305mm)	1147	1184	1208	1220
Lumens per foot UP (305mm)	757	781	797	805
Lumens per foot DOWN (305mm)	390	403	411	415
Input Power (W), 4' rail length (1219mm)	51.8	51.8	51.8	51.8
Watts per foot (305mm)	13	13	13	13
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.



IES Report

ZipThree® | Ceiling Cable | 707 | Symmetric, up | 60° Symmetric, down | 90 CRI | HO

707-Z3-XX-4-48-CC-XX-XX-XX-X-0-Z-HO-359-U1S2-0-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	81	84	86	87
Total Lumens, 4' rail length (1219mm)	8720	8996	9179	9271
Lumens per foot (305mm)	2180	2249	2295	2318
Lumens per foot UP (305mm)	1438	1484	1514	1529
Lumens per foot DOWN (305mm)	742	765	781	789
Input Power (W), 4' rail length (1219mm)	107.7	107.7	107.7	107.7
Watts per foot (305mm)	27	27	27	27
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on vode.com.