

IES Report




BoxRail® | 107 | Black Baffle | 80 CRI | LO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	35	36	37	37
Total Lumens, 4' rail length (1219mm)	481	496	506	506
Lumens per foot (305mm)	120	124	127	127
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

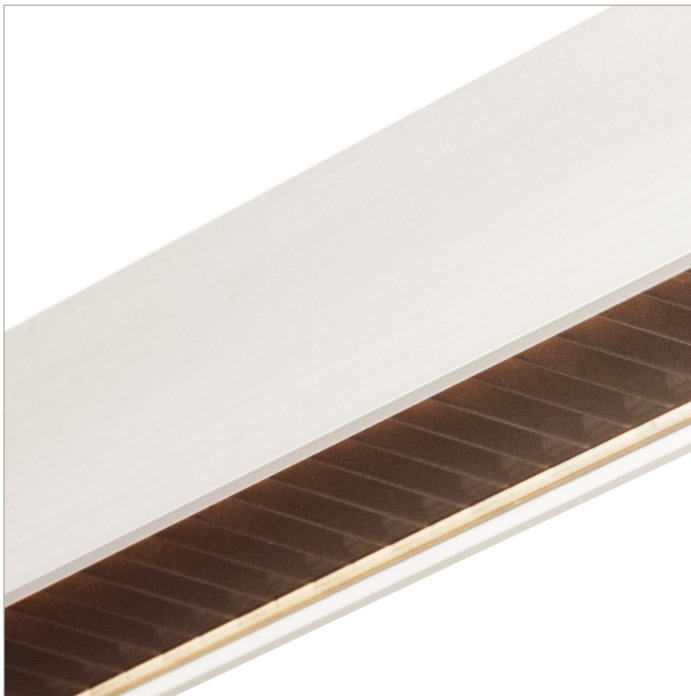

IES Report




BoxRail® | 107 | Black Baffle | 80 CRI | SO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	41	42	43	43
Total Lumens, 4' rail length (1219mm)	962	992	1013	1013
Lumens per foot (305mm)	241	248	253	253
Input Power (W), 4' rail length (1219mm)	23.9	23.9	23.9	23.9
Watts per foot (305mm)	6.0	6.0	6.0	6.0
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

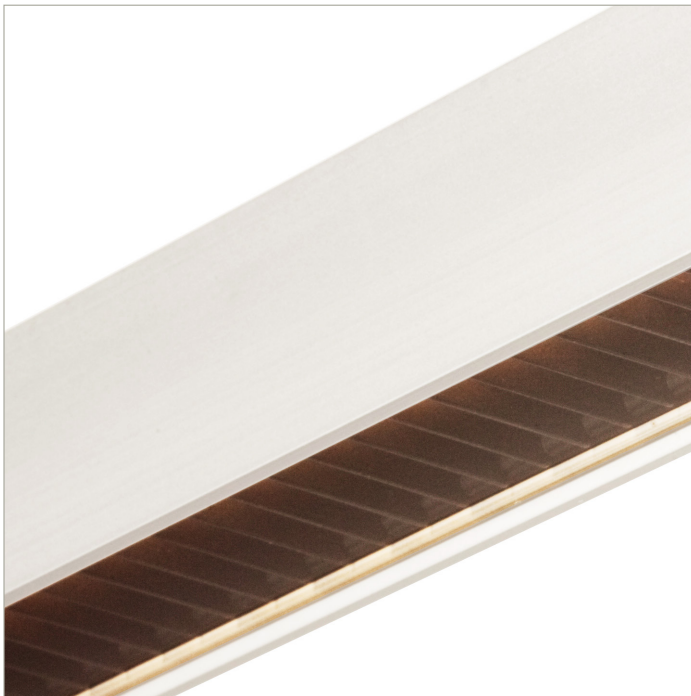

IES Report



BoxRail® | 107 | Black Baffle | 80 CRI | HO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	38	39	40	40
Total Lumens, 4' rail length (1219mm)	1828	1886	1924	1924
Lumens per foot (305mm)	457	471	481	481
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report



BoxRail® | 107 | Black Baffle | 90 CRI | LO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	31	31	32	32
Total Lumens, 4' rail length (1219mm)	415	428	437	441
Lumens per foot (305mm)	104	107	109	110
Input Power (W), 4' rail length (1219mm)	13.8	13.8	13.8	13.8
Watts per foot (305mm)	3.5	3.5	3.5	3.5
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




BoxRail® | 107 | Black Baffle | 90 CRI | SO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	35	36	37	37
Total Lumens, 4' rail length (1219mm)	829	856	873	882
Lumens per foot (305mm)	207	214	218	220
Input Power (W), 4' rail length (1219mm)	23.9	23.9	23.9	23.9
Watts per foot (305mm)	6.0	6.0	6.0	6.0
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

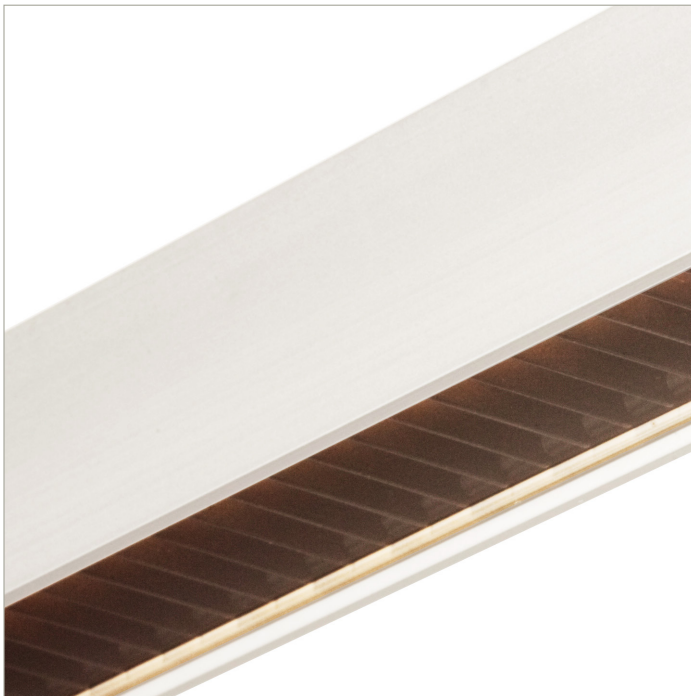

IES Report

BoxRail® | 107 | Black Baffle | 90 CRI | HO

107-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-BB-X-XX-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	33	34	34	35
Total Lumens, 4' rail length (1219mm)	1576	1626	1659	1675
Lumens per foot (305mm)	394	406	415	419
Input Power (W), 4' rail length (1219mm)	49.1	49.1	49.1	49.1
Watts per foot (305mm)	12.3	12.3	12.3	12.3
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).