

IES Report




BoxRail® | 207 | Wide Batwing, up | Diffuse, down | 80 CRI | LO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1D1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	78	80	82	82
Total Lumens, 4' rail length (1219mm)	2219	2289	2336	2336
Lumens per foot (305mm)	555	572	584	584
Lumens per foot UP (305mm)	346	357	364	364
Lumens per foot DOWN (305mm)	208	215	219	219
Input Power (W), 4' rail length (1219mm)	28.8	28.8	28.8	28.8
Watts per foot (305mm)	7.2	7.2	7.2	7.2
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

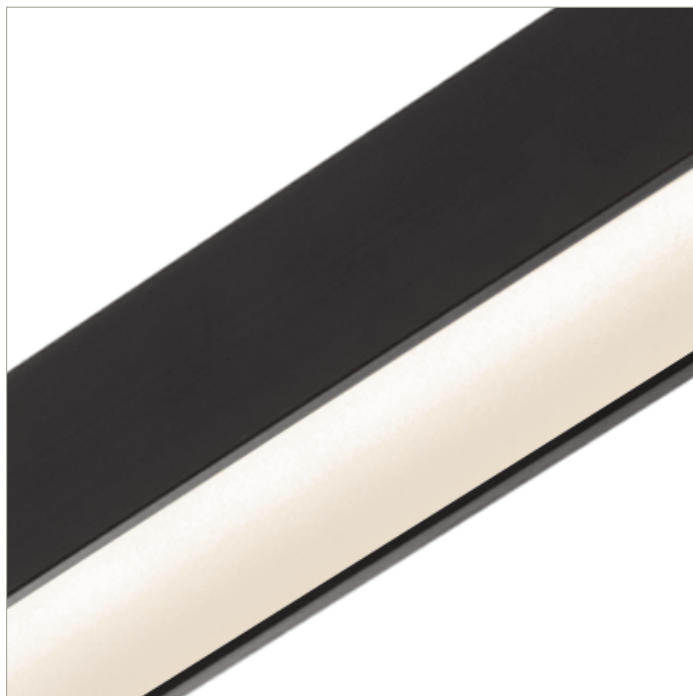

IES Report




BoxRail® | 207 | Wide Batwing, up | Diffuse, down | 80 CRI | SO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1D1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	88	91	93	93
Total Lumens, 4' rail length (1219mm)	4438	4578	4671	4671
Lumens per foot (305mm)	1109	1144	1168	1168
Lumens per foot UP (305mm)	692	714	729	729
Lumens per foot DOWN (305mm)	417	430	439	439
Input Power (W), 4' rail length (1219mm)	50.5	50.5	50.5	50.5
Watts per foot (305mm)	12.7	12.7	12.7	12.7
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

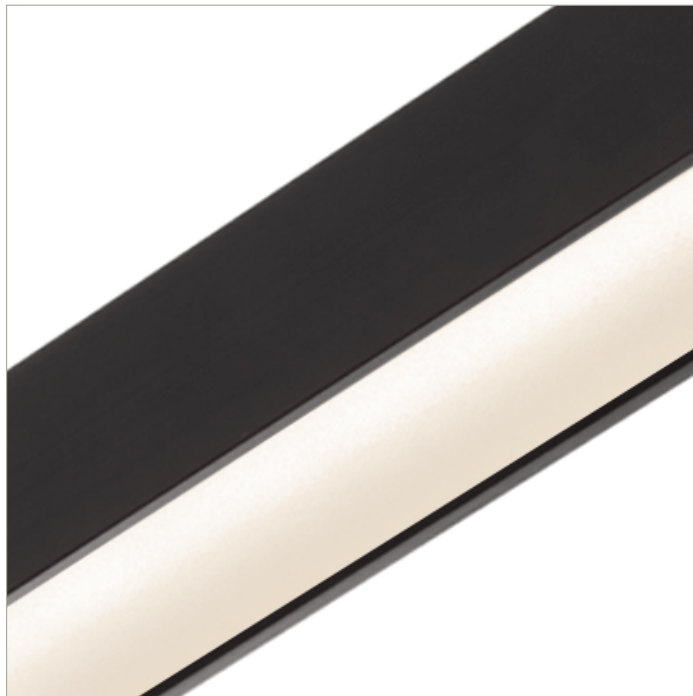

IES Report



BoxRail® | 207 | Wide Batwing, up | Diffuse, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1D1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	82	85	87	87
Total Lumens, 4' rail length (1219mm)	8432	8698	8875	8875
Lumens per foot (305mm)	2108	2174	2219	2219
Lumens per foot UP (305mm)	1316	1357	1385	1385
Lumens per foot DOWN (305mm)	792	817	834	834
Input Power (W), 4' rail length (1219mm)	103.1	103.1	103.1	103.1
Watts per foot (305mm)	25.8	25.8	25.8	25.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES Report




BoxRail® | 207 | Wide Batwing, up | Diffuse, down | 90 CRI | LO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1D1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	67	69	71	71
Total Lumens, 4' rail length (1219mm)	1913	1973	2013	2034
Lumens per foot (305mm)	478	493	503	508
Lumens per foot UP (305mm)	298	308	314	317
Lumens per foot DOWN (305mm)	180	185	189	191
Input Power (W), 4' rail length (1219mm)	28.8	28.8	28.8	28.8
Watts per foot (305mm)	7.2	7.2	7.2	7.2
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

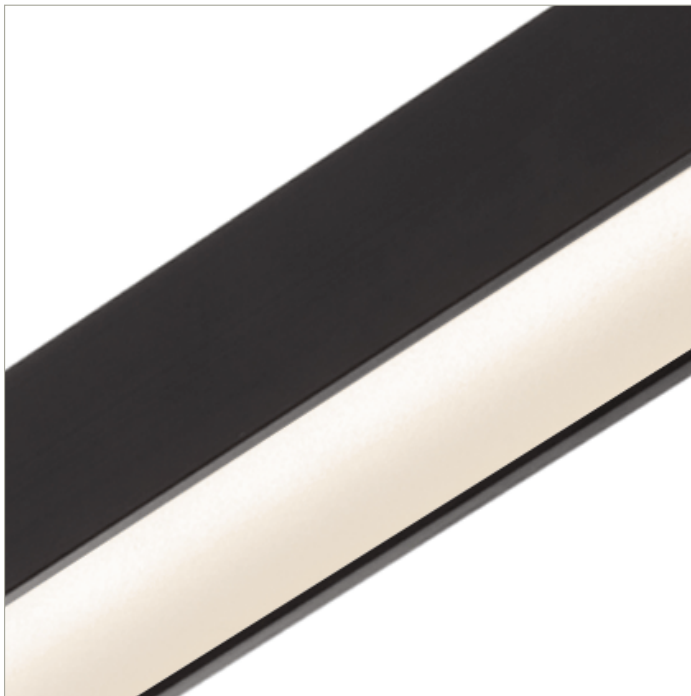

IES Report




BoxRail® | 207 | Wide Batwing, up | Diffuse, down | 90 CRI | SO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1D1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	79	81	81
Total Lumens, 4' rail length (1219mm)	3826	3946	4027	4067
Lumens per foot (305mm)	956	987	1007	1017
Lumens per foot UP (305mm)	597	616	628	635
Lumens per foot DOWN (305mm)	359	371	378	382
Input Power (W), 4' rail length (1219mm)	50.5	50.5	50.3	50.5
Watts per foot (305mm)	12.7	12.7	12.6	12.7
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

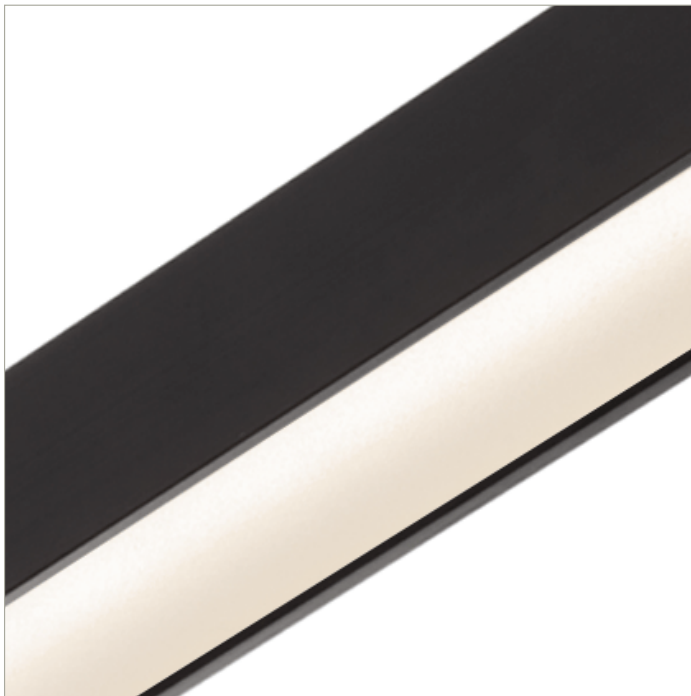

IES Report

BoxRail® | 207 | Wide Batwing, up | Diffuse, down | 90 CRI | HO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1D1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	71	73	75	75
Total Lumens, 4' rail length (1219mm)	7269	7498	7651	7728
Lumens per foot (305mm)	1817	1875	1913	1932
Lumens per foot UP (305mm)	1134	1170	1194	1206
Lumens per foot DOWN (305mm)	683	705	719	726
Input Power (W), 4' rail length (1219mm)	103.1	103.1	103.1	103.1
Watts per foot (305mm)	25.8	25.8	25.8	25.8
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).