

IES Report




BoxRail® | 207 | 85° Asymmetric, down | 80 CRI | LO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-A1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	46	48	49	49
Total Lumens, 4' rail length (1219mm)	660	681	695	695
Lumens per foot (305mm)	165	170	174	174
Input Power (W), 4' rail length (1219mm)	14.4	14.4	14.4	14.4
Watts per foot (305mm)	3.6	3.6	3.6	3.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

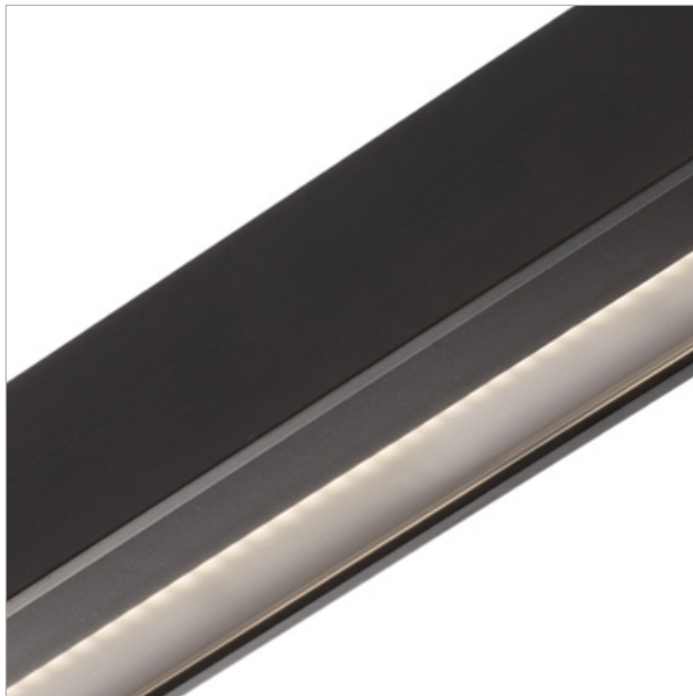

IES Report




BoxRail® | 207 | 85° Asymmetric, down | 80 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-35-A1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	53	54	56	56
Total Lumens, 4' rail length (1219mm)	1321	1363	1390	1390
Lumens per foot (305mm)	330	341	348	348
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

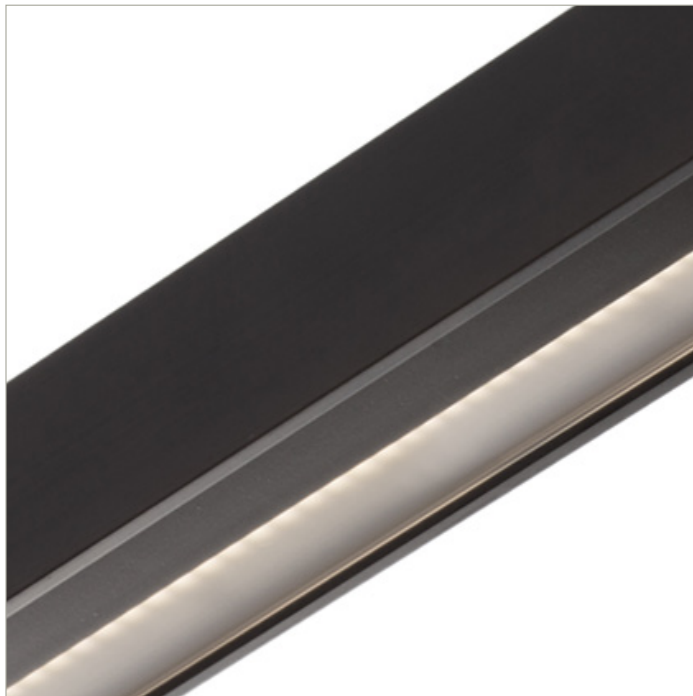

IES Report




BoxRail® | 207 | 85° Asymmetric, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-A1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	49	51	52	52
Total Lumens, 4' rail length (1219mm)	2510	2589	2642	2642
Lumens per foot (305mm)	627	647	660	660
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

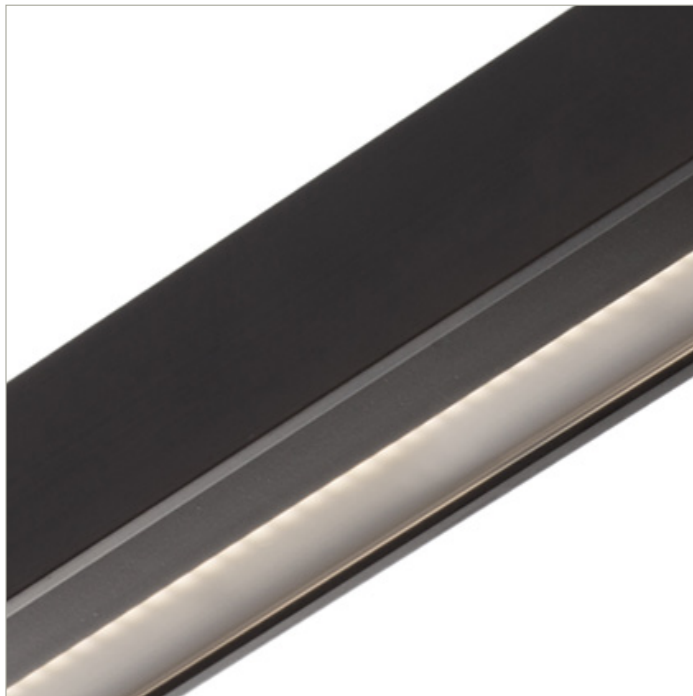

IES Report




BoxRail® | 207 | 85° Asymmetric, down | 90 CRI | LO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-A1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	40	41	42	43
Total Lumens, 4' rail length (1219mm)	569	587	599	605
Lumens per foot (305mm)	142	147	150	151
Input Power (W), 4' rail length (1219mm)	14.4	14.4	14.4	14.4
Watts per foot (305mm)	3.6	3.6	3.6	3.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

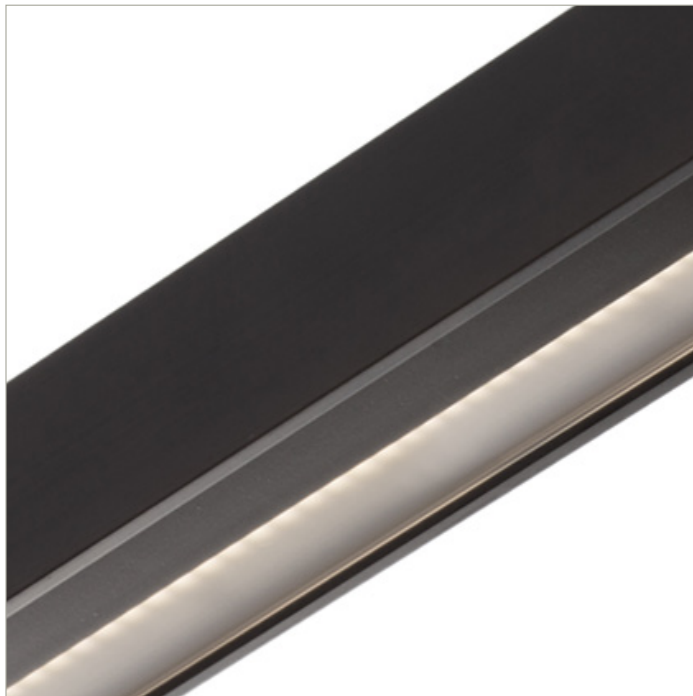

IES Report




BoxRail® | 207 | 85° Asymmetric, down | 90 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-359-A1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	46	47	48	48
Total Lumens, 4' rail length (1219mm)	1139	1175	1199	1211
Lumens per foot (305mm)	285	294	300	303
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

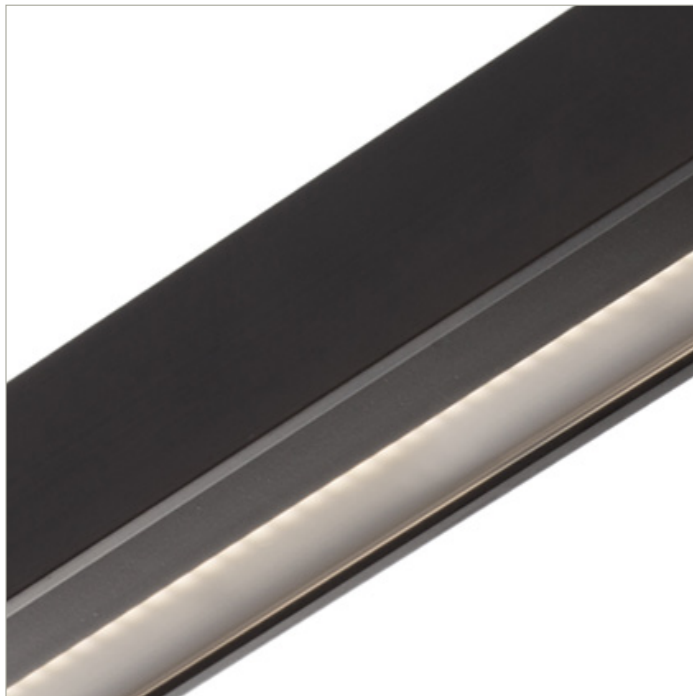

IES Report

BoxRail® | 207 | 85° Asymmetric, down | 90 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-359-A1-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	42	44	45	45
Total Lumens, 4' rail length (1219mm)	2164	2232	2277	2300
Lumens per foot (305mm)	541	558	569	575
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).