

IES Report




BoxRail® | 207 | Wide Batwing, up | 80 CRI | LO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	104	107	109	109
Total Lumens, 4' rail length (1219mm)	1485	1532	1564	1564
Lumens per foot (305mm)	371	383	391	391
Input Power (W), 4' rail length (1219mm)	14.4	14.4	14.4	14.4
Watts per foot (305mm)	3.6	3.6	3.6	3.6
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

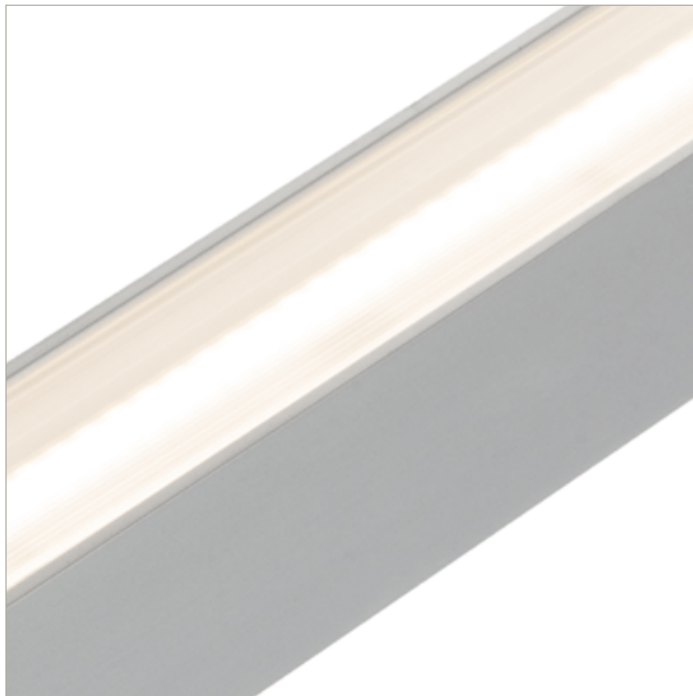

IES Report




BoxRail® | 207 | Wide Batwing, up | 80 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-35-G1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	118	122	124	124
Total Lumens, 4' rail length (1219mm)	2971	3065	3127	3127
Lumens per foot (305mm)	743	766	782	782
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

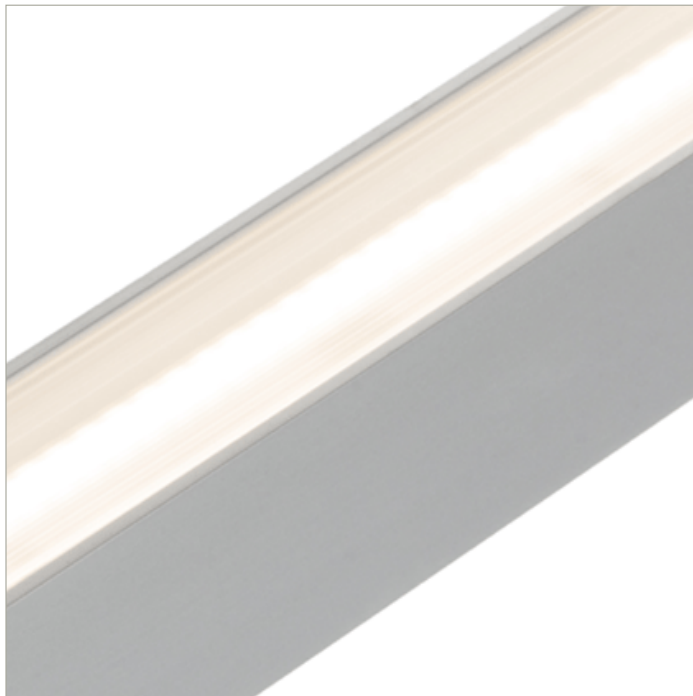

IES Report




BoxRail® | 207 | Wide Batwing, up | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-35-G1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	110	113	116	116
Total Lumens, 4' rail length (1219mm)	5645	5823	5942	5942
Lumens per foot (305mm)	1411	1456	1485	1485
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

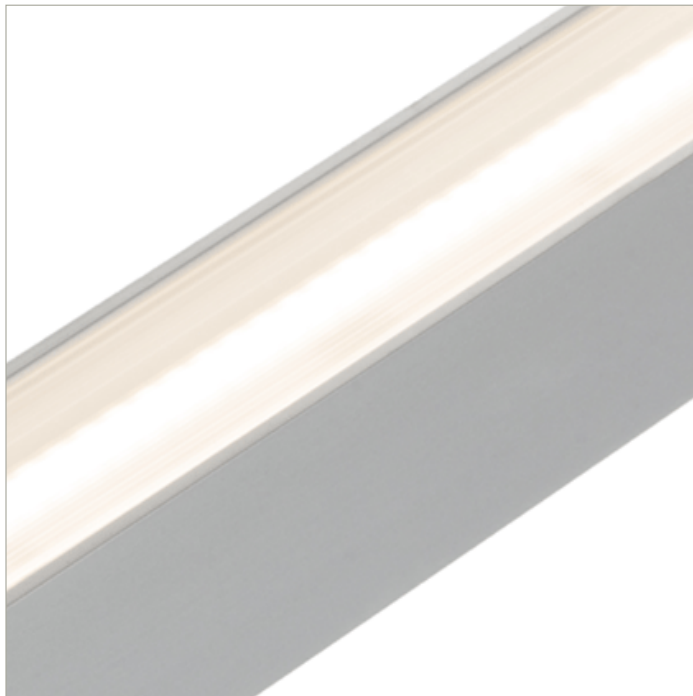

IES Report




BoxRail® | 207 | Wide Batwing, up | 90 CRI | LO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-LO-359-G1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	90	92	94	95
Total Lumens, 4' rail length (1219mm)	1281	1321	1348	1361
Lumens per foot (305mm)	320	330	337	340
Input Power (W), 4' rail length (1219mm)	14.4	14.4	14.4	14.4
Watts per foot (305mm)	3.6	3.6	3.6	3.6
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

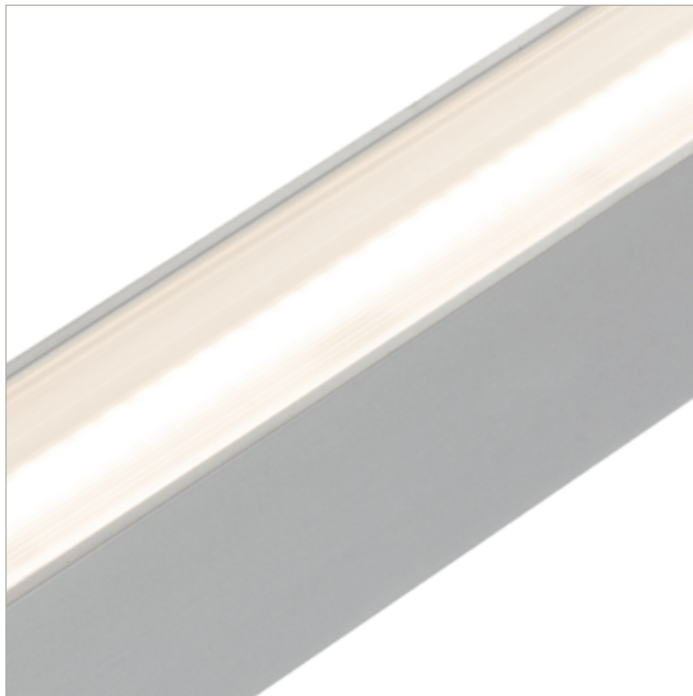

IES Report




BoxRail® | 207 | Wide Batwing, up | 90 CRI | SO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-SO-359-G1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	102	105	107	108
Total Lumens, 4' rail length (1219mm)	2561	2642	2696	2723
Lumens per foot (305mm)	640	661	674	681
Input Power (W), 4' rail length (1219mm)	25.3	25.3	25.3	25.3
Watts per foot (305mm)	6.4	6.4	6.4	6.4
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

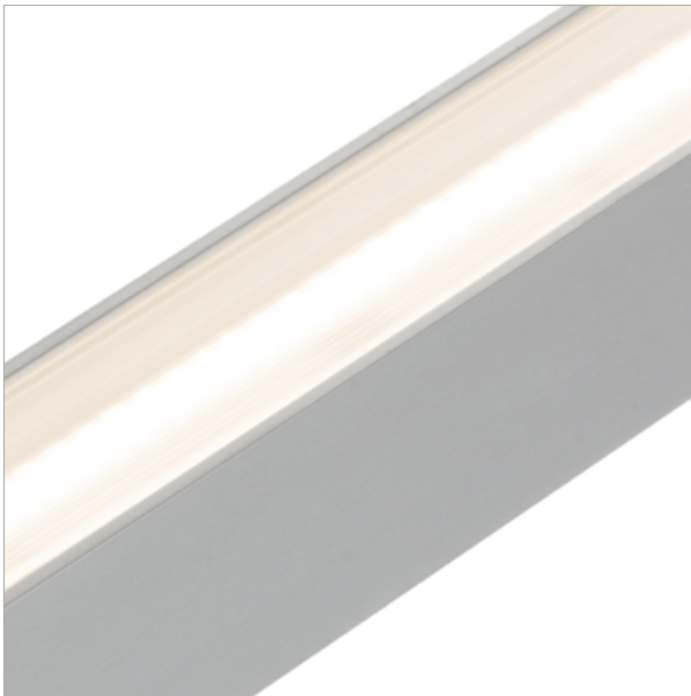

IES Report

BoxRail® | 207 | Wide Batwing, up | 90 CRI | HO

207-BX-XX-4-48-XX-XX-XX-X-X-Z-HO-359-G1-X-AL / WH-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	95	98	100	101
Total Lumens, 4' rail length (1219mm)	4866	5020	5122	5174
Lumens per foot (305mm)	1217	1255	1281	1293
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).