

## IES Report




**BoxRail<sup>®</sup> | 207 | Wide Batwing, up | 60° Symmetric, down | 80 CRI | LO**

**207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-35-G1S2-X-BL-X**

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	67	69	70	70
Total Lumens, 4' rail length (1219mm)	1899	1959	1998	1998
Lumens per foot (305mm)	475	490	500	500
Lumens per foot UP (305mm)	334	345	352	352
Lumens per foot DOWN (305mm)	141	145	148	148
Input Power (W), 4' rail length (1219mm)	28.8	28.8	28.8	28.8
Watts per foot (305mm)	7.2	7.2	7.2	7.2
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

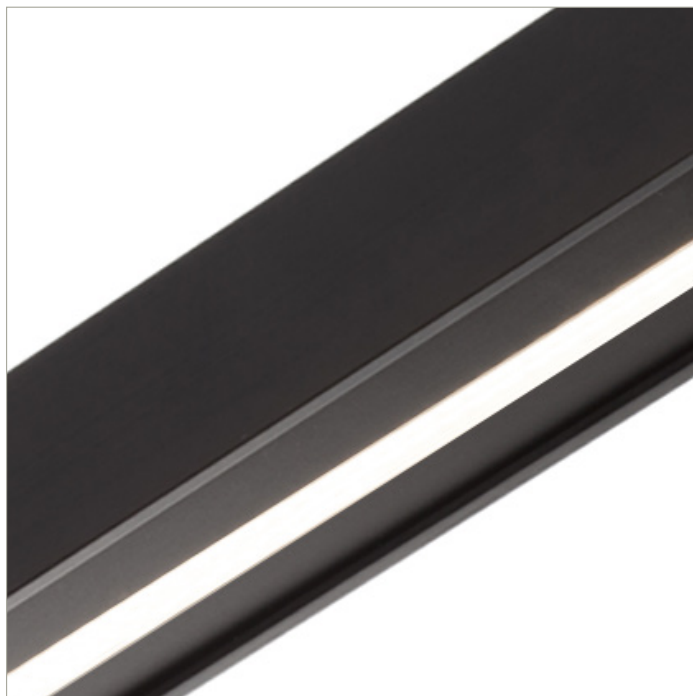

## IES Report




BoxRail<sup>®</sup> | 207 | Wide Batwing, up | 60° Symmetric, down | 80 CRI | SO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-35-G1S2-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	76	78	80	80
Total Lumens, 4' rail length (1219mm)	3797	3917	3997	3997
Lumens per foot (305mm)	949	979	999	999
Lumens per foot UP (305mm)	668	689	703	703
Lumens per foot DOWN (305mm)	281	290	296	296
Input Power (W), 4' rail length (1219mm)	50.5	50.5	50.5	50.5
Watts per foot (305mm)	12.7	12.7	12.7	12.7
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

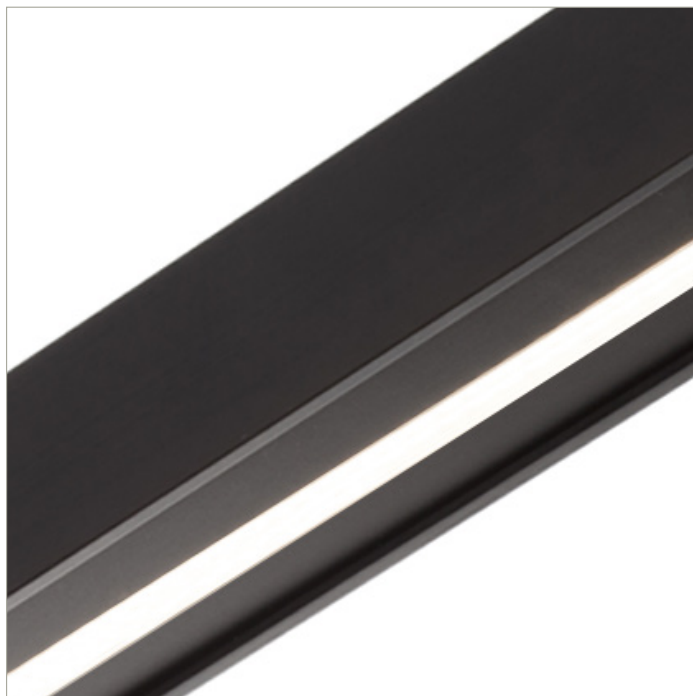

## IES Report




BoxRail<sup>®</sup> | 207 | Wide Batwing, up | 60° Symmetric, down | 80 CRI | HO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-35-G1S2-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	70	73	74	74
Total Lumens, 4' rail length (1219mm)	7215	7442	7594	7594
Lumens per foot (305mm)	1804	1861	1899	1899
Lumens per foot UP (305mm)	1269	1309	1336	1336
Lumens per foot DOWN (305mm)	534	551	563	563
Input Power (W), 4' rail length (1219mm)	103.1	103.1	103.1	103.1
Watts per foot (305mm)	25.8	25.8	25.8	25.8
CRI	82	82	82	82

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

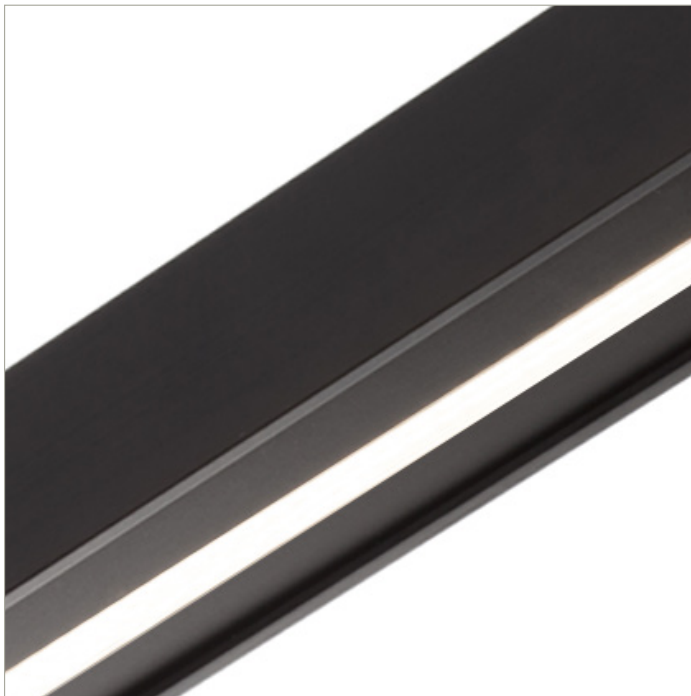

## IES Report




BoxRail® | 207 | Wide Batwing, up | 60° Symmetric, down | 90 CRI | LO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-LO-359-G1S2-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	57	59	60	61
Total Lumens, 4' rail length (1219mm)	1637	1688	1723	1740
Lumens per foot (305mm)	409	422	431	435
Lumens per foot UP (305mm)	288	297	303	306
Lumens per foot DOWN (305mm)	121	125	128	129
Input Power (W), 4' rail length (1219mm)	28.8	28.8	28.8	28.8
Watts per foot (305mm)	7.2	7.2	7.2	7.2
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

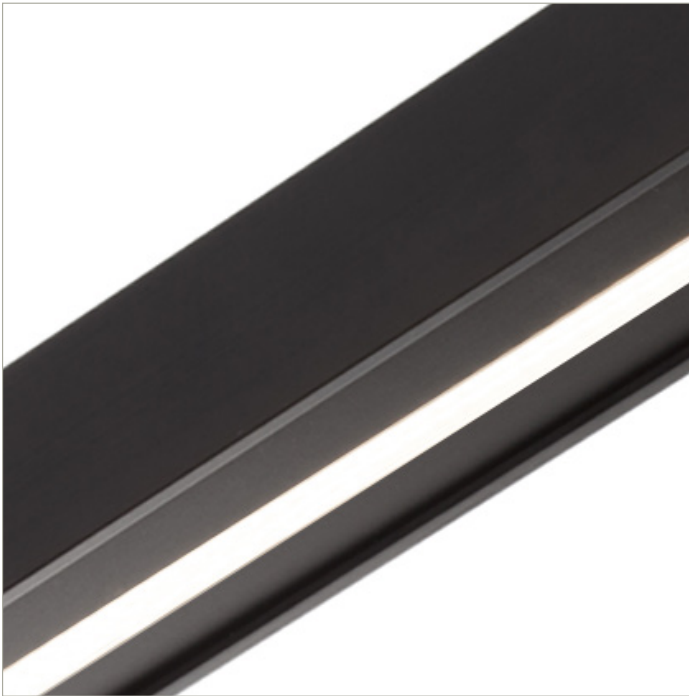

## IES Report




BoxRail® | 207 | Wide Batwing, up | 60° Symmetric, down | 90 CRI | SO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-SO-359-G1S2-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	65	67	69	69
Total Lumens, 4' rail length (1219mm)	3273	3377	3446	3480
Lumens per foot (305mm)	818	844	861	870
Lumens per foot UP (305mm)	576	594	606	612
Lumens per foot DOWN (305mm)	242	250	255	258
Input Power (W), 4' rail length (1219mm)	50.5	50.5	50.5	50.5
Watts per foot (305mm)	12.7	12.7	12.7	12.7
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).

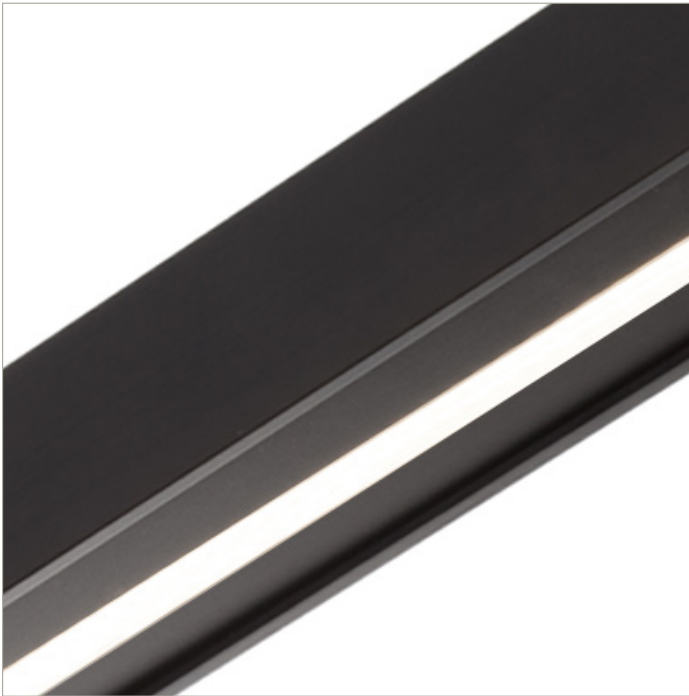

## IES Report

BoxRail® | 207 | Wide Batwing, up | 60° Symmetric, down | 90 CRI | HO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-G1S2-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	61	63	64	65
Total Lumens, 4' rail length (1219mm)	6219	6416	6547	6612
Lumens per foot (305mm)	1555	1604	1637	1653
Lumens per foot UP (305mm)	1094	1129	1152	1163
Lumens per foot DOWN (305mm)	461	475	485	490
Input Power (W), 4' rail length (1219mm)	103.1	103.1	103.1	103.1
Watts per foot (305mm)	25.8	25.8	25.8	25.8
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).