

IES Report

BoxRail® | 207 | White Baffle, down | 90 CRI | HO

207-BX-XX-4-48-XX-XX-XX-XX-X-X-Z-HO-359-WB-X-BL-X

	2700K	3000K	3500K	4000K
Efficacy - Lumens per Watt	52	53	54	55
Total Lumens, 4' rail length (1219mm)	2634	2717	2773	2800
Lumens per foot (305mm)	659	679	693	700
Input Power (W), 4' rail length (1219mm)	51.6	51.6	51.6	51.6
Watts per foot (305mm)	12.9	12.9	12.9	12.9
CRI	94	94	94	94

Due to the large number of options in Vode's product offering, most Vode IES reports are factored reports prepared from source reports. Source reports are the IES test reports prepared for Vode by an NVLAP accredited photometric test laboratory. Factored reports are based on data from the Vode source reports.

If the data above is in black, it is directly from a Vode source report. If it is in grey, it is factored from Vode source reports. Reference details on Vode source reports can be found on the [IES File Finder](#) page on [vode.com](#).



IES INDOOR REPORT

PHOTOMETRIC FILENAME : VODE_207_BX_HO_359_WB_BL.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] L022010916 (SOURCE REPORT FOR REFERENCE)

[TESTLAB] REPORT BASED ON DATA FROM NVLAP ACCREDITED LAB

[ISSUEDATE] 12/23/2019

[MANUFAC] Vode Lighting

[LUMCAT] 207-BX-48-Z-HO-359-WB-BL

[LUMINAIRE] BoxRail LED, 48", 3500K, 90 CRI, zipper board,

[MORE] white baffle w/clear lens down, high output, black anodized finish

[TEST PROCEDURE] IESNA:LM-79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2773
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	54
Total Luminaire Watts	51.57
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.28
Spacing Criterion (90-270)	0.72
Spacing Criterion (Diagonal)	0.94
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.08 ft
Luminous Width (90-270)	4.00 ft
Luminous Height	0.09 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4632	11416	16249
55	2904	6394	12943
65	2524	3253	9801
75	569	1102	6373
85	211	285	2331

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_359_WB_BL.IES

CANDELA TABULATION

	<u>0</u>	<u>5</u>	<u>10</u>	<u>15</u>	<u>20</u>	<u>25</u>	<u>30</u>	<u>35</u>	<u>40</u>	<u>45</u>
0	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7
5	2356.0	2342.7	2331.3	2319.9	2308.5	2297.1	2287.6	2276.2	2268.6	2259.1
10	2331.3	2308.5	2285.7	2262.9	2242.0	2221.1	2202.1	2166.0	2131.8	2101.4
15	2287.6	2253.4	2219.2	2186.9	2150.8	2095.7	2042.5	1993.1	1945.6	1903.8
20	2223.0	2177.4	2135.6	2086.2	2010.2	1939.9	1871.5	1806.9	1746.1	1691.0
25	2143.2	2090.0	2040.6	1951.3	1858.2	1770.8	1689.1	1613.1	1523.8	1440.2
30	2036.8	1976.0	1903.8	1791.7	1685.3	1584.6	1483.9	1377.5	1276.8	1185.6
35	1890.5	1820.2	1719.5	1596.0	1478.2	1360.4	1242.6	1126.7	1020.3	912.0
40	1113.4	1083.0	1043.1	1026.0	1027.9	1033.6	946.2	839.8	741.0	634.6
45	207.1	248.9	334.4	418.0	452.2	457.9	518.7	516.8	480.7	435.1
50	142.5	155.8	178.6	201.4	226.1	269.8	300.2	321.1	324.9	321.1
55	129.2	138.7	153.9	171.0	188.1	209.0	224.2	229.9	233.7	235.6
60	121.6	125.4	131.1	136.8	144.4	152.0	157.7	159.6	163.4	169.1
65	108.3	104.5	98.8	96.9	98.8	100.7	102.6	106.4	108.3	112.1
70	58.9	57.0	57.0	57.0	57.0	58.9	58.9	60.8	64.6	68.4
75	22.8	22.8	24.7	24.7	24.7	26.6	26.6	28.5	32.3	34.2
80	9.5	11.4	9.5	11.4	11.4	11.4	11.4	11.4	11.4	13.3
85	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6
90	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6	7.6

Vert. Horizontal Angles

	<u>50</u>	<u>55</u>	<u>60</u>	<u>65</u>	<u>70</u>	<u>75</u>	<u>80</u>	<u>85</u>	<u>90</u>
0	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7	2361.7
5	2251.5	2243.9	2238.2	2232.5	2228.7	2226.8	2223.0	2223.0	2223.0
10	2074.8	2050.1	2029.2	2010.2	1993.1	1979.8	1972.2	1964.6	1964.6
15	1863.9	1827.8	1795.5	1768.9	1748.0	1729.0	1713.8	1704.3	1702.4
20	1634.0	1580.8	1535.2	1493.4	1459.2	1434.5	1409.8	1390.8	1387.0
25	1364.2	1301.5	1246.4	1198.9	1157.1	1124.8	1102.0	1084.9	1083.0
30	1102.0	1024.1	946.2	877.8	822.7	775.2	739.1	714.4	712.5
35	801.8	701.1	649.8	611.8	581.4	554.8	537.7	528.2	526.3
40	568.1	507.3	480.7	465.5	452.2	442.7	435.1	431.3	427.5
45	416.1	399.0	387.6	376.2	366.7	361.0	355.3	351.5	349.6
50	319.2	311.6	304.0	300.2	296.4	290.7	286.9	285.0	285.0
55	237.5	235.6	233.7	233.7	231.8	229.9	228.0	226.1	228.0
60	174.8	172.9	176.7	176.7	176.7	176.7	176.7	174.8	174.8
65	117.8	119.7	127.3	129.2	129.2	129.2	131.1	131.1	129.2
70	72.2	76.0	79.8	83.6	87.4	87.4	89.3	89.3	89.3
75	36.1	39.9	43.7	47.5	51.3	51.3	53.2	55.1	53.2
80	15.2	15.2	17.1	19.0	20.9	22.8	24.7	24.7	24.7
85	7.6	5.7	5.7	5.7	5.7	5.7	5.7	7.6	7.6
90	5.7	5.7	5.7	3.8	3.8	3.8	1.9	1.9	3.8

IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_359_WB_BL.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	756.04	N.A.	27.30
0-30	1446.39	N.A.	52.20
0-40	2073.42	N.A.	74.80
0-60	2607.01	N.A.	94.00
0-80	2763.1	N.A.	99.70
0-90	2772.73	N.A.	100.00
10-90	2560.38	N.A.	92.30
20-40	1317.39	N.A.	47.50
20-50	1659.37	N.A.	59.80
40-70	647.52	N.A.	23.40
60-80	156.09	N.A.	5.60
70-80	42.15	N.A.	1.50
80-90	9.64	N.A.	0.30
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	2772.73	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	212.35
10-20	543.69
20-30	690.36
30-40	627.03
40-50	341.98
50-60	191.61
60-70	113.94
70-80	42.15
80-90	9.64
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00


IES INDOOR REPORT
PHOTOMETRIC FILENAME : VODE_207_BX_HO_359_WB_BL.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	109	106	104	101	102	100	98	99	97	95	95	94	92	90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81
3	98	90	84	79	96	89	83	79	86	81	77	84	80	76	81	78	75	73
4	92	83	76	71	90	82	75	71	79	74	70	77	73	69	75	71	68	66
5	86	76	69	64	84	75	69	64	73	68	63	72	67	63	70	66	62	60
6	81	70	63	58	79	70	63	58	68	62	58	67	61	57	65	60	57	55
7	76	65	58	53	75	65	58	53	63	57	53	62	57	53	61	56	52	51
8	72	61	54	49	71	60	54	49	59	53	49	58	53	49	57	52	48	47
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43
10	64	53	47	42	63	53	46	42	52	46	42	51	46	42	50	45	42	40

POLAR GRAPH

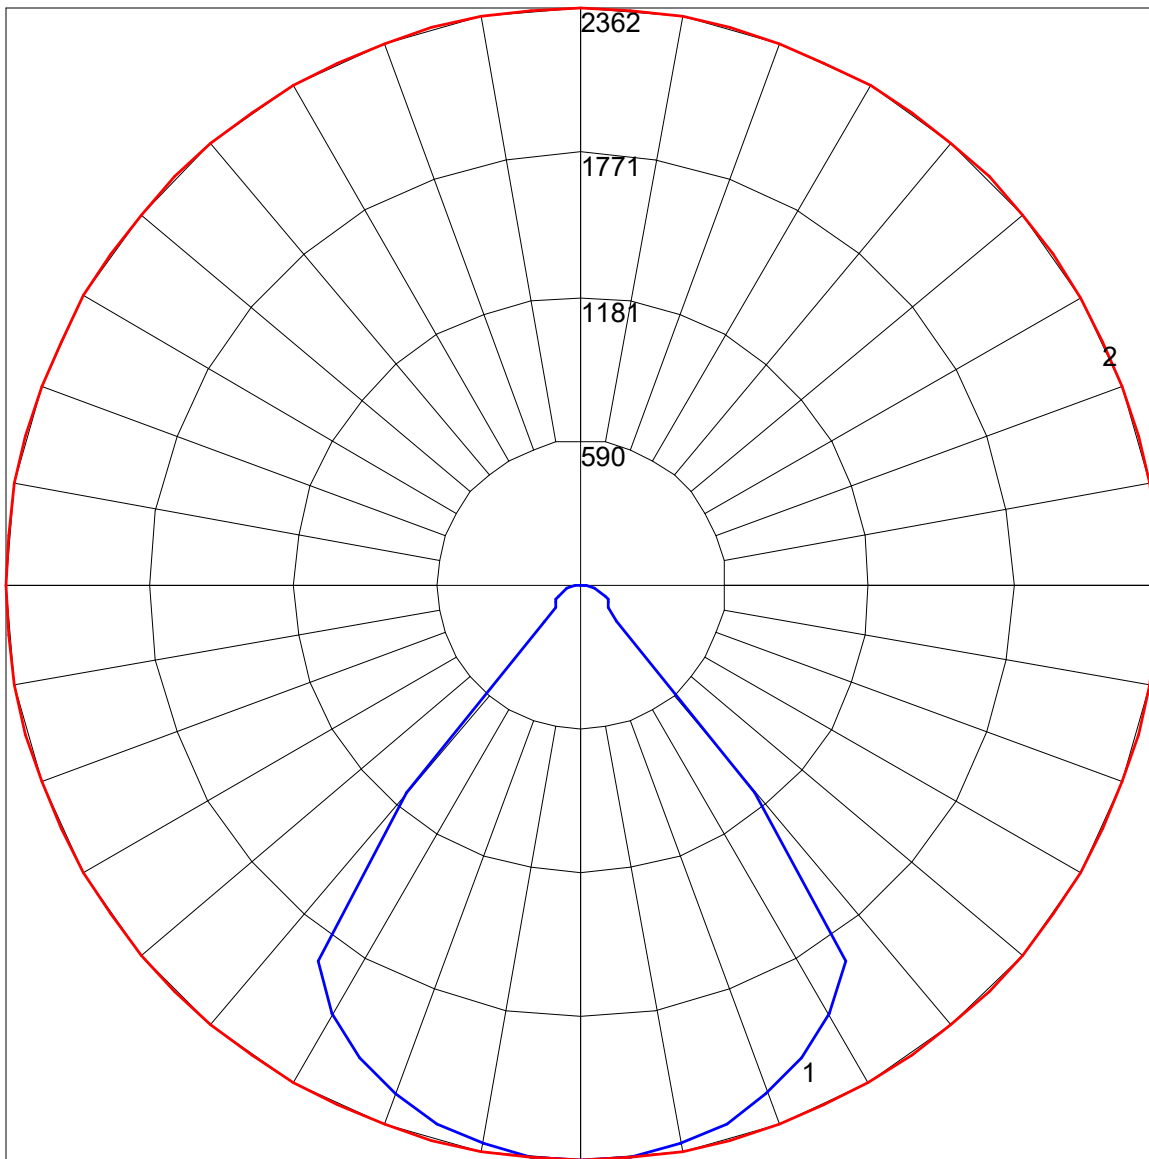

Maximum Candela = 2361.7 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)