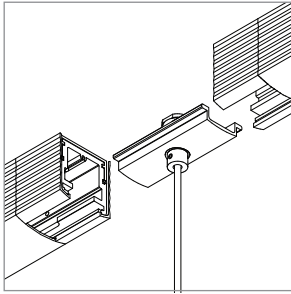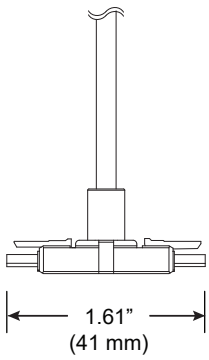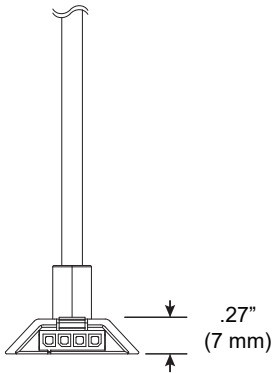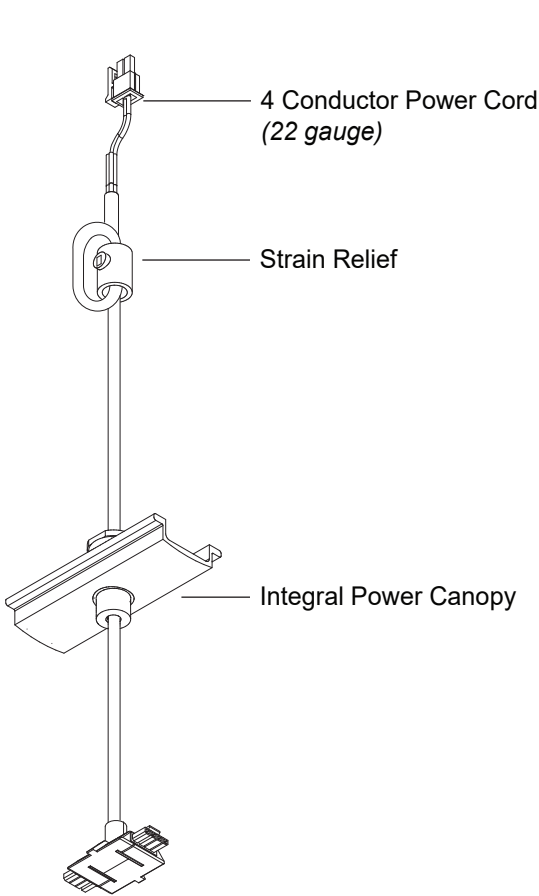**vode®** Adaptive architectural lighting systems

Integral Power, Single Direction Coupler

For use with System | 707

Connects System | 707 | ZipTwo suspended rails for integral power ceiling cable installations.
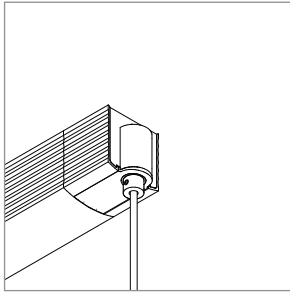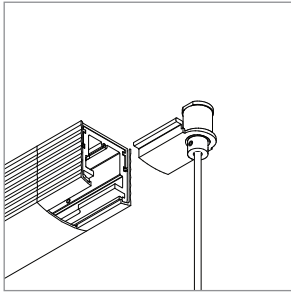
Technical Support: 707-996-9898

4 Conductor Power Cord
(22 gauge)

Strain Relief

Integral Power Canopy

.27"
(7 mm)

1.61"
(41 mm)
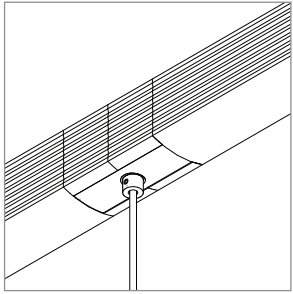
PART NUMBER   **707-Z2-CP-XX-CC-IP-4C-YY**

DESCRIPTION   System LED 707, ZipTwo, suspension coupler, 48" or 96" (1219mm or 2438mm) ceiling cable, integral power, 4 conductor. Available in white painted (WH) with white cable and white canopy, black anodized (BL) with black cable and black canopy.

Integral Power, Single Direction Hub

For use with System | 707

Mounts System | 707 | ZipTwo suspended for integral power ceiling cable installations.

4 Conductor Power Cord
(22 gauge)

Strain Relief

Integral Power Canopy

.27"
(7 mm)

.95"
(24 mm)

PART NUMBER   **707-Z2-HB-XX-CC-IP-4C-YY**

DESCRIPTION   System LED 707, ZipTwo, suspension hub, 48" or 96" (1219mm or 2438mm) ceiling cable, integral power, 4 conductor. Available in white painted (WH) with white cable and white canopy, black anodized (BL) with black cable and black canopy.
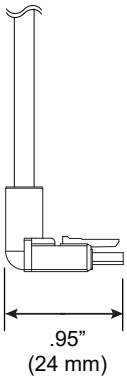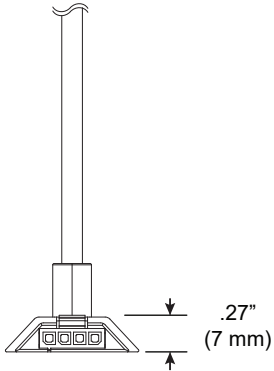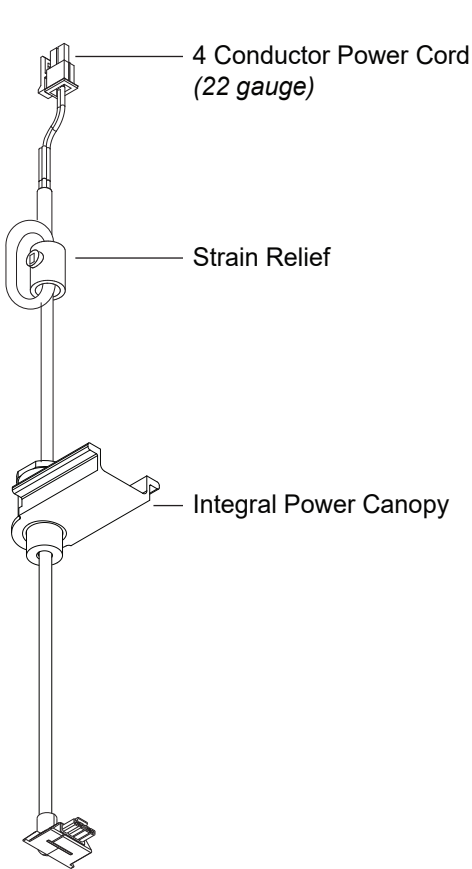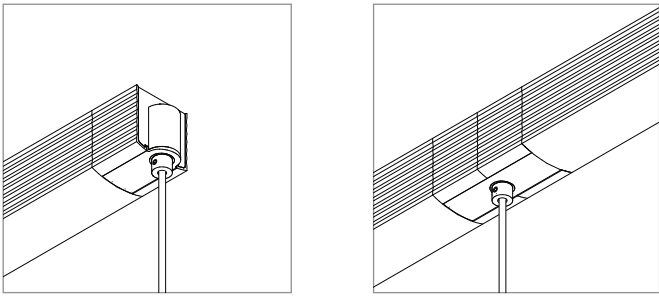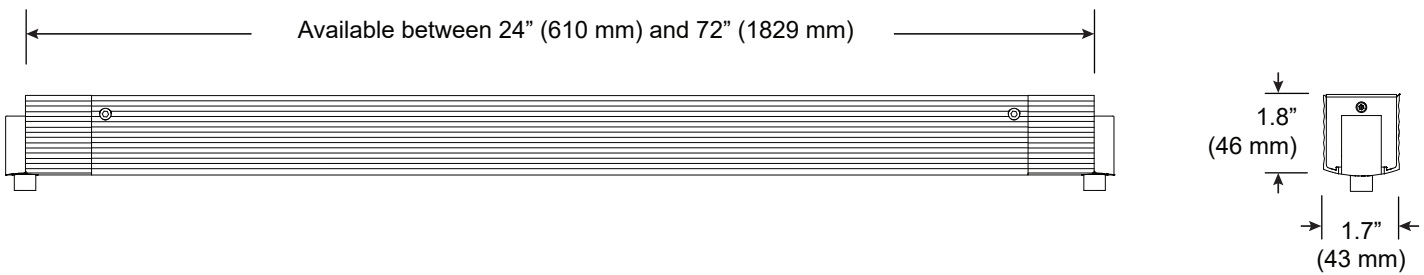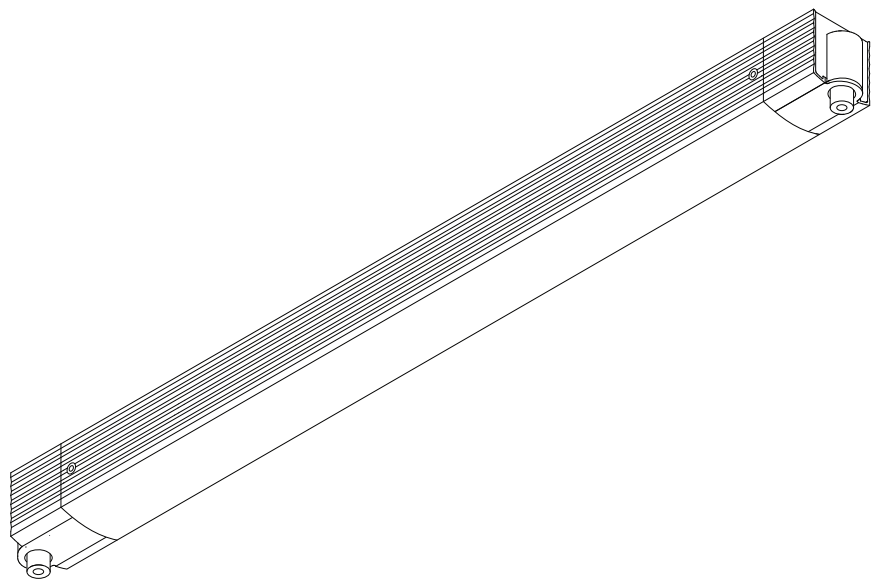
Ceiling Cable Integral Power

For use with System | 107 | 207 | 707

Houses integral power supply. Direct conduit feed is recommended, but integral power supply housing will mount to any standard North America 4" j-box. Mounts to most surfaces. Blocking is recommended at all arm junctions.

Technical Support: 707-996-9898

Available between 24" (610 mm) and 72" (1829 mm)

1.8" (46 mm)

1.7" (43 mm)

PART NUMBER   **107-IP-...-C-YY**

DESCRIPTION   Ceiling Cable Power Housing, System 107, integral, available in anodized aluminum (AL), white painted (WH) and black anodized (AB)